

PT-DNL1 Installation Instructions

SAVE THESE INSTRUCTIONS

WARNING – TO REDUCE THE RISK OF FIRE OR INJURY TO PERSONS:


- Turn power OFF or unplug fixture and allow it to cool before replacing lamp.
- Lamp gets HOT quickly. Contact only switch/plug when turning on.
- Do not touch hot lens, guard, or fixture housing until it has cooled.
- Keep lamp away from combustibles.
- Do not touch halogen lamp. Use a soft cloth. Oil from skin may damage lamp.
- Do not operate the fixture fitting with a missing or damaged shield.

IMPORTANT SAFETY INSTRUCTIONS

- For outdoor use only.
- Make sure the power is turned OFF before installing or servicing this fixture.
- WARNING: Risk of electrical shock. Install all fixtures 10 feet (3.05 m) or more from a pool, spa, or fountain.
- This fixture is to be used with a low voltage power supply that does not exceed 15V.
- Position the wire and wire connector so that is connected within 6 inches (15.2 cm) from a building structure, a fixture or fitting.
- Not to be buried except for a maximum of 6 inches to connect to the main low voltage cable.

LAMP INSTALLATION/REPLACEMENT INSTRUCTIONS

- 1) Remove shroud from the fixture housing.
- 2) Insert MR16 lamp (50W max) into the lamp socket.
- 3) Replace shroud and secure with the set screw to the fixture housing.

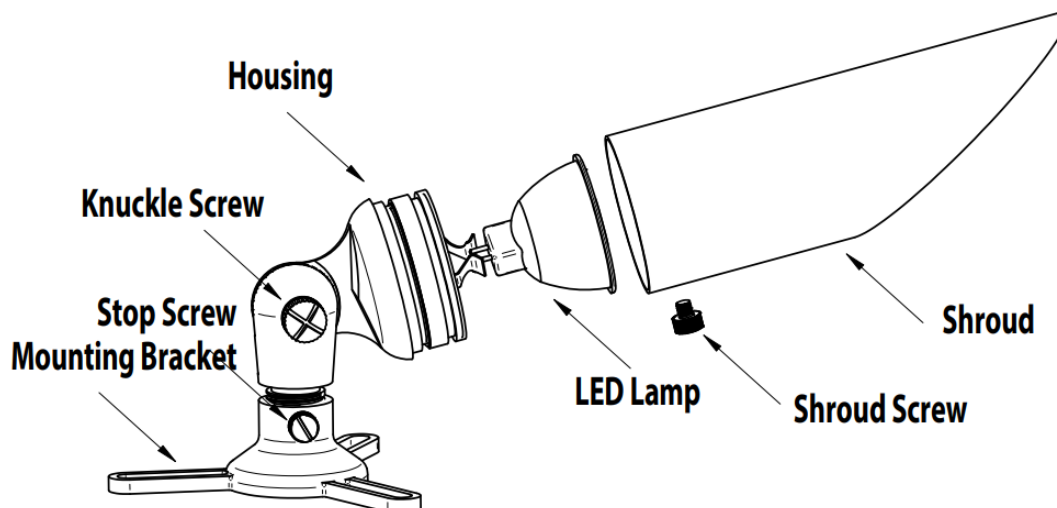

FIXTURE MOUNTING INSTRUCTIONS

- 1) Disconnect transformer from main power supply.
- 2) Remove shroud from the fixture housing.
- 3) Insert MR16 lamp (50W max) into the lamp socket.
- 4) Replace shroud and secure with the set screw to the fixture housing.
- 5) Run lead wire from fixture through the slot on the mounting bracket.
- 6) Attach mounting bracket onto desired location. Fixture designed to be operated in the downward facing direction.
- 7) Screw fixture onto mounting bracket and tighten until snug. Secure by tightening stop screw. Make sure that the fixture's set screw and weep hole are facing downward.
- 8) Strip the two fixture lead wires and connect them to the main low voltage supply cable lead with silicone filled wire connectors.

