



WELLXTROL®

Featuring Antimicrobial Protection

WELL ABOVE THE REST®





WELLXTROL®


Amtrol invented the Well-X-Trol precharged well tank nearly six decades ago, revolutionizing well pump protection. Its innovative design featured a hoop ring and groove to lock the diaphragm, liner and shell together in a totally unique way.

This tradition of innovation continued with Amtrol's Next Generation Well-X-Trol, utilizing high strength steel to deliver a 150 psig working pressure – 20% higher than competitive well tanks, to earn an industry leading 7-year warranty.

Now Well-X-Trol is combining the patented Turbulator™ with patent pending antimicrobial liner protection to deliver Clean Water Technology™ in every tank.

Well-X-Trol – the world's most trusted brand in well tanks; setting the standard for quality, reliability and performance.

Amtrol App puts sizing and support at your fingertips. Available for iPhone, iPad and Android.

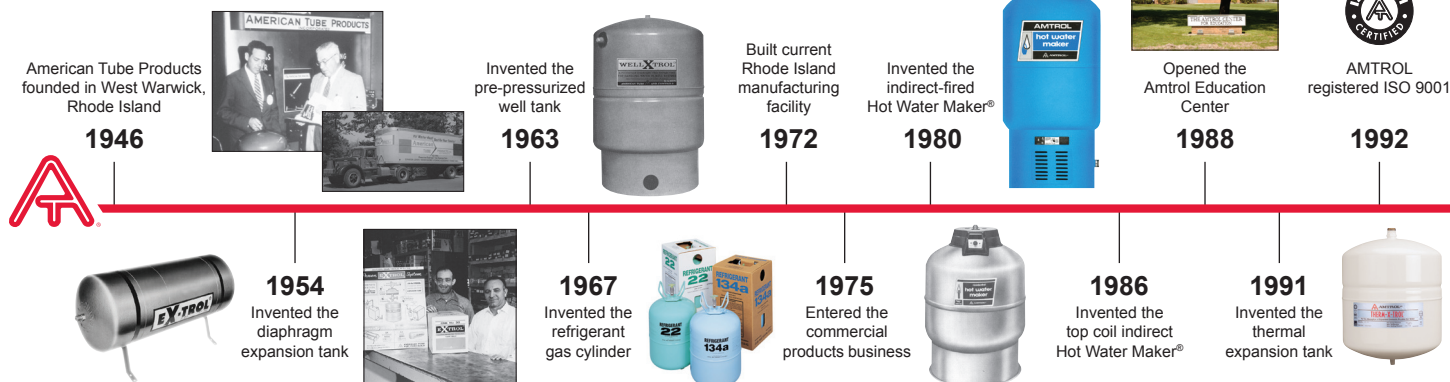

The First and Still the Best.



The complete line of Well-X-Trol well tanks includes inline, stand, underground, wall hung, horizontal and pump stand models.

Contractors earn valuable rewards points for every Well-X-Trol well tank installed. Visit amtrolrewards.com for complete details.





WELLXTROL®

7-Year Warranty

- Installers asked for it - we delivered.
- A Well-X-Trol exclusive and the best warranty in the industry.

High Strength Steel

- Deep-drawn domes are double the strength of rolled steel.

Multi-Dome Construction

- Provides internal bracing for added strength.
- Prevents diaphragm over-extension.

Heavy Duty Butyl Diaphragm

- The industry's thickest diaphragm provides extra strength and flexibility.
- Seamless design conforms exactly to the shell without stretching, creasing or forming bubbles that could trap water or sediment.
- Meets stringent FDA requirements.

Positive Diaphragm Seal


- Unique hoop ring and groove design secures the diaphragm, liner and shell for added strength and reliability.
- Exclusive welding process eliminates rough spots and sharp edges that can damage the diaphragm and liner.

Stainless Steel System Connection

- High grade stainless steel withstands aggressive water conditions.

Optional Pro-Access® Connection

- Piped to stand for fast, easy installation.



Well Above The Rest.®

150 psig Working Pressure

- 20% higher rating than competitive well tanks.
- Every tank is pressure tested for added safety.
- Precharged to 38 psig for the most common pump cut-in pressure.


Projection Welded Air Valve

- Eliminates leak paths found on threaded valves.
- Maintains air charge better than mechanical seals.

Tuf-Kote™ HG Indoor/Outdoor Coating

- Stands up to the most severe conditions.
- Standard on all models; available in blue, tan and gray.

Antimicrobial Liner



Fresh Water Turbulator™



Patented
Turbulator™



In-line
Models



Stand
Models

DuraBase® Composite Tank Stand

- Optional composite stand features patented design.
- UV resistant material is rugged and will never corrode.
- Available separately as a spacer for steel stand models.

Clean Water Technology™ in Every Tank

Patent-pending technology; Antimicrobial Liner and Turbulator work together to keep tank surfaces clean.




Antimicrobial™



Turbulator™


Antimicrobial Liner Protection

- Safe, Silver-Ion technology targets active microorganisms; neutralizes bacteria on contact.
- Compound is molded into the water reservoir lining; lasts the life of the tank.

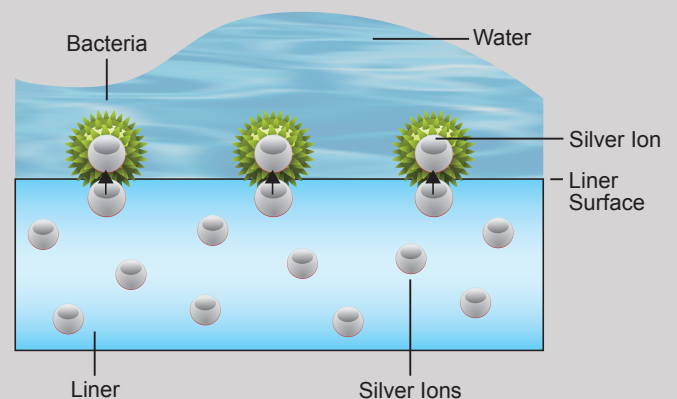

Fresh Water Turbulator™

- Patented diffuser agitates incoming water to keep it tasting fresh and clean.
- Water-jet scrubbing action prevents sediment from collecting inside the tank.



InLine Models



Model Number	Tank Volume (Gallons)	Max. Acceptance Factor	Diameter (Inches)	Height (Inches)	System Connection (NPTM)	System Drawdown (gallons)			Shipping Weight (lbs.)
						30/50	40/60	50/70	
WX-101	2.0	.45	8	13	¾	0.6	0.6	0.5	5
WX-102	4.4	.55	11	15	¾	1.4	1.2	1.0	9
WX-103	7.6	.43	11	22	¾	2.4	2.0	1.8	15
WX-104	10.3	1.00	15	18	1	3.2	2.8	2.4	20
WX-200	14.0	.81	15	22	1	4.3	3.8	3.3	22

Tan and Gray: Available on all models. Use suffix T or G.

Stand Models



Model Number	Tank Volume (Gallons)	Max. Acceptance Factor	Diameter (Inches)	Height (Inches)	System Connection (NPTF)	System Drawdown (gallons)			Shipping Weight (lbs.)
						30/50	40/60	50/70	
WX-201	14.0	.81	15	25	1	4.3	3.8	3.3	25
WX-202	20.0	.57	15	32	1	6.2	5.4	4.7	32
WX-202XL	26.0	.44	15	39	1	8.0	7.0	6.1	39
WX-203	32.0	.35	15	47	1	9.9	8.6	7.6	47
WX-205	34.0	1.00	22	30	1¼	10.5	9.1	8.0	57
WX-250	44.0	.77	22	36	1¼	13.6	11.8	10.4	65
WX-251	62.0	.55	22	47	1¼	19.2	16.6	14.6	87
WX-255	81.0	.41	22	57	1¼	25.0	21.7	19.1	109
WX-252	86.0	.39	22	62	1¼	26.6	23.0	20.3	107
WX-302	86.0	.54	26	47	1¼	26.6	23.0	20.3	106
WX-350	119.0	.39	26	62	1¼	36.8	31.9	28.1	146

DuraBase®: Available on all models except WX-252. Use suffix D.

Pro Access®: Available on all models except WX-201, WX-252 and DuraBase models. Use suffix PA.

Tan and Gray: Available on all models except WX-252. Use suffix T or G.

Underground Models



Model Number	Tank Volume (Gallons)	Max. Acceptance Factor	Diameter (Inches)	Height (Inches)	System Connection (NPTF)	System Drawdown (gallons)			Shipping Weight (lbs.)
						30/50	40/60	50/70	
WX-200UG	14.0	.81	15	22	1	4.3	3.8	3.3	22
WX-202UG	20.0	.57	15	30	1	6.2	5.4	4.7	30
WX-250UG	44.0	.77	22	33	1¼	13.6	11.8	10.4	60
WX-251UG	62.0	.55	22	44	1¼	19.2	16.6	14.6	83

Note: System Drawdown can be affected by various ambient and system conditions, including temperature and pressure.