



The Patented C-Frame Downspray is a 360° spray jet that distributes water evenly across the wetted surface area. Stake assembly options provide savings in labor and installation time.

### Features

- 45° downspray reduces the effect of wind.
- Gentle spray minimizes damage to delicate plant foliage.
- Galvanized wire stake assembly with 36" tubing.
- Three color coded frames to identify flow rates.
- "Quick" thread for easy insertion into tubing.
- Shut-Off Clip to stop flow.
- Patented functionality.
- UV stabilized materials for long life.

### Applications


Nurseries, tree lots, potted plants, home and landscaped gardens.

### Performance Chart

Pattern		360°	
Color & Orifice Size	Pressure (psi)	Flow (gph)	Diameter (in)
0.032"	10	4.8	24
	15	6.0	24
	20	7.2	20
0.035"	10	6.0	24
	15	7.5	20
	20	8.6	20
0.039"	10	7.0	24
	15	8.9	20
	20	10.5	20



Cfd™ Downspray Range

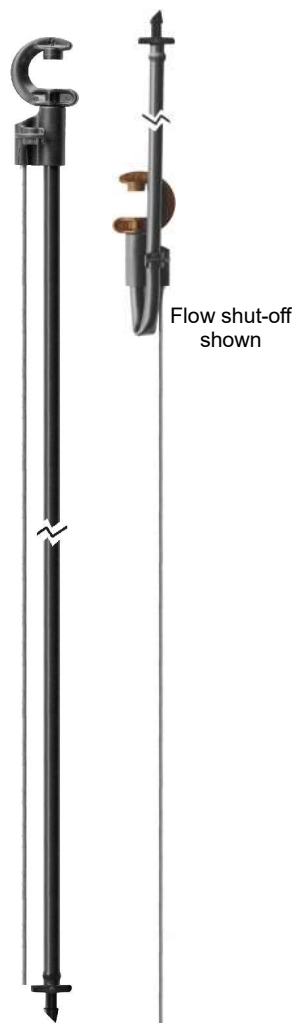

Flow shut-off shown

Cfd™ Downspray Wire Stake Assembly

### Ordering Information - Cfd™ Downspray

Color & Orifice Size	Part Number	Pack Quantity	Packs Per Carton	Carton (lbs)
0.032"	19005	100	50	18.1
0.035"	19025	100	50	18.1
0.039"	19015	100	50	18.1

### Ordering Information - Cfd™ Galvanized Wire Stake Assembly with Shut-Off Clip

Color & Orifice Size	Tube Length	Part Number	Pack Quantity	Packs per Carton	Carton (lbs)
0.032"	36"	54305	25	12	20.1
0.035"	36"	54325	25	12	20.1
0.039"	36"	54315	25	12	20.1

### Specifications - Cfd™ & CFa AgSpray™

Dimensions Assembled		Cfd™ Downspray & CFa AgSpray™	Cfd™ Downspray Wire Stake Assembly	CFa AgSpray™ Stake Assembly
HEIGHT		1.3"	37.4"	13.7"
WIDTH		1.0"	1.0"	1.0"
DEPTH		0.3"	0.6"	1.6"
WEIGHT (approx.)		0.05 oz	1.00 oz	1.80 oz
UV STABILIZED MATERIALS	FRAME	acetal	acetal	acetal
	STAKE ADAPTER		polypropylene	
	OFF-TAKE TUBE		PEVA	PE
	BARB ADAPTER		acetal	acetal
	STAKE		galvanized steel	polypropylene
BASE/CONNECTION TYPE: Inlet		"QUICK" THREAD with SEALING BARB 0.16"	BARB 0.16"	BARB 0.16"