



THE HARRINGTON CORPORATION

DUCTILE IRON IPS TAPPED TEE (Service Tee)

Ductile Iron: ASTM A536


Joints: ASTM D-3139

Gaskets: ASTM F477; SBR Std

Pressure Rating: 350psi

Coatings: Bituminous-AWWA C153, Standard Cement Lining-AWWA C104

Fusion Bond Coating-AWWA C116, Protecto 401

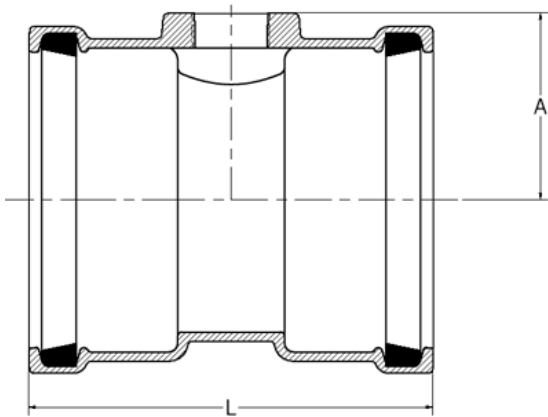

| SIZE | PART # | A | L | WT |
|---------------|--------|------|-------|------|
| 3" x 1" FNPT | 803502 | 2.33 | 9.19 | 10.6 |
| 3" x 1½" FNPT | 803503 | 2.33 | 9.19 | 10.6 |
| 3" x 2" FNPT | 803504 | 2.33 | 9.19 | 10.6 |
| 4" x 1" FNPT | 804502 | 2.79 | 11.14 | 15.6 |
| 4" x 1½" FNPT | 804503 | 2.79 | 11.14 | 15.6 |
| 4" x 2" FNPT | 804504 | 2.79 | 11.14 | 15.6 |
| 6" x 1" FNPT | 806502 | 4.18 | 10.18 | 21.0 |
| 6" x 1½" FNPT | 806503 | 4.18 | 10.18 | 20.7 |
| 6" x 2" FNPT | 806504 | 4.02 | 13.43 | 27.1 |
| 8" x 2" FNPT | 808504 | 4.93 | 14.30 | 39.0 |

