



THE HARRINGTON CORPORATION

DUCTILE IRON IPS TAPPED TEE (Service Tee)

Ductile Iron: ASTM A536


Joints: ASTM D-3139

Gaskets: ASTM F477; SBR Std

Pressure Rating: 350psi

Coatings: Bituminous-AWWA C153, Standard Cement Lining-AWWA C104

Fusion Bond Coating-AWWA C116, Protecto 401

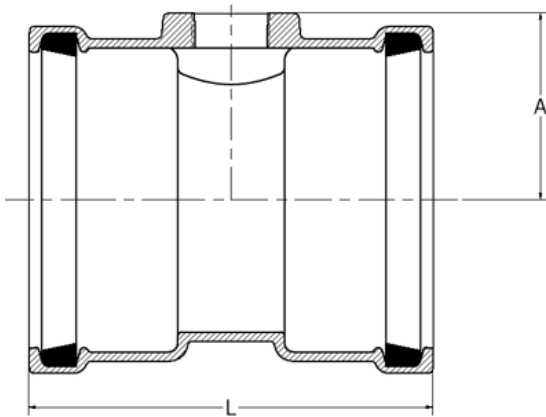

SIZE	PART #	A	L	WT
3" x 1" FNPT	803502	2.33	9.19	10.6
3" x 1½" FNPT	803503	2.33	9.19	10.6
3" x 2" FNPT	803504	2.33	9.19	10.6
4" x 1" FNPT	804502	2.79	11.14	15.6
4" x 1½" FNPT	804503	2.79	11.14	15.6
4" x 2" FNPT	804504	2.79	11.14	15.6
6" x 1" FNPT	806502	4.18	10.18	21.0
6" x 1½" FNPT	806503	4.18	10.18	20.7
6" x 2" FNPT	806504	4.02	13.43	27.1
8" x 2" FNPT	808504	4.93	14.30	39.0

