


# Direct Bury SPL

## FEATURES

- Includes 2 "screw-tight" brass wire connectors with external thread
- 2 oversized, gel filled wire, nuts with internal threads to accept "screw tight" connectors
- Recommended use for outdoor lighting or other uses of 30 volts or less
- **DO NOT USE** for LogicPLUS or other two-wire communication system

## Common AWG Wire combination

Quantity	Size	Combination
2-3	#10	1#10 to 1#12
2-4	#12	1#10 to 1 or 2#14
3-4	#14	1#12 to 1 or 2#14
4-6	#16	1#12 to 2 or 3#16

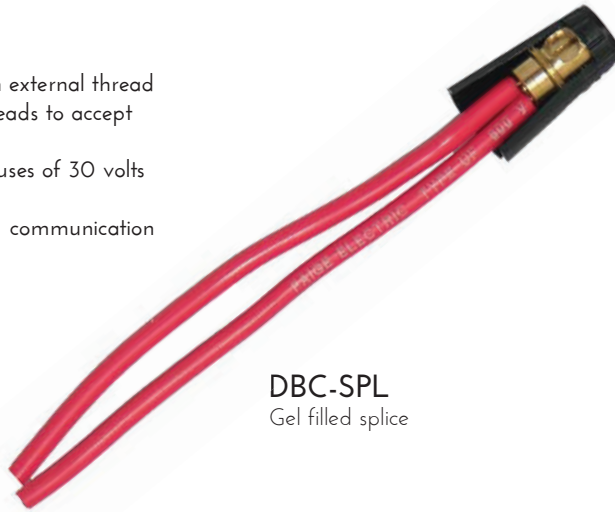

DBC-SPL  
Gel filled splice

## ORDER SPECIFICATION GUIDE : Model

Model

DBC-SPL = Direct bury splice kit

# Pump Start Relay

## FEATURES

- Mechanical Relay (not solid state)
- Relay is UC Approved
- 2 Horsepower and 5 Horsepower rated relays available
- Compatible with all standard 24 VAC Controllers



PS-200  
2 HP Pump Start Relay Single Phase

## ORDER SPECIFICATION GUIDE : Model

Model

PS-200 = Pump Start Relay, 2 HP, 24 VAC Coil, 110/220 VAC, Single Phase

PS-500 = Pump Start Relay, 5 HP, 24 VAC Coil, 110/220 VAC, Single Phase

