


# PVC SCHEDULE-40 LO-TORQUE BALL VALVE

RATED @150 PSI @ 72°F STATIC PRESSURE  
MOLDED IN THE USA  
1/2", 3/4", & 1" MADE FROM PVC TYPE I  
1 1/4", 1 1/2", & 2" MADE FROM PVC TYPE II  
HANDLE IS MADE FROM ABS

FPT—FEMALE PIPE THREAD  
IPS—IRON PIPE SIZE (SAME AS SCHEDULE 40)

NSF / ANSI 61 + 372 LISTED & UPC LISTED

“S” - IPS SLIP CONNECTION  
“T” - IPS FPT CONNECTION

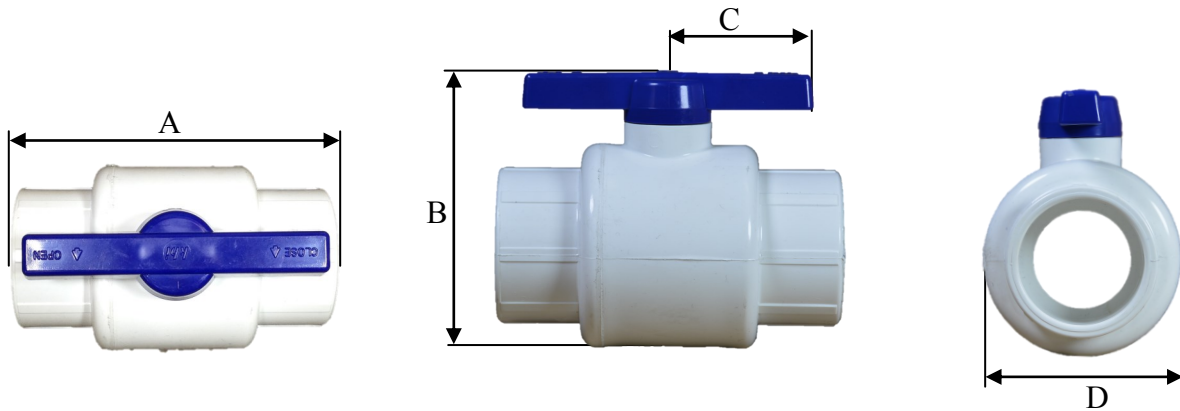

| PART NUMBER              | A (INCHES) | B (INCHES) | C (INCHES) | D (INCHES) | WEIGHT (LBS) | CONNECTION SIZE |
|--------------------------|------------|------------|------------|------------|--------------|-----------------|
| WLT-0500-S<br>WLT-0500-T | 3.43       | 2.41       | 1.50       | 1.58       | 0.20         | 1/2" IPS        |
| WLT-0750-S<br>WLT-0750-T | 4.05       | 2.96       | 1.86       | 2.00       | 0.35         | 3/4" IPS        |
| WLT-1000-S<br>WLT-1000-T | 4.56       | 3.41       | 2.18       | 2.30       | 0.50         | 1" IPS          |
| WLT-1250-S<br>WLT-1250-T | 5.25       | 4.18       | 2.50       | 2.89       | 0.85         | 1 1/4" IPS      |
| WLT-1500-S<br>WLT-1500-T | 5.68       | 4.42       | 2.50       | 3.14       | 1.05         | 1 1/2" IPS      |
| WLT-2000-S<br>WLT-2000-T | 6.39       | 5.21       | 2.75       | 3.85       | 1.70         | 2" IPS          |