




PAVERS

CUMBERLAND

The Cumberland series features undulating surfaces and rumpled edges which recall the timeless appeal of quarried basalt setts. Cumberland - also available in a Circle Pack - is designed for repeating random runner and ashlar patterns, which install quickly and create the aesthetic of historical Old World pavements. Cumberland is available in a tumbled finish, which weathers the stones by breaking and softening edges and corners.

UNITS

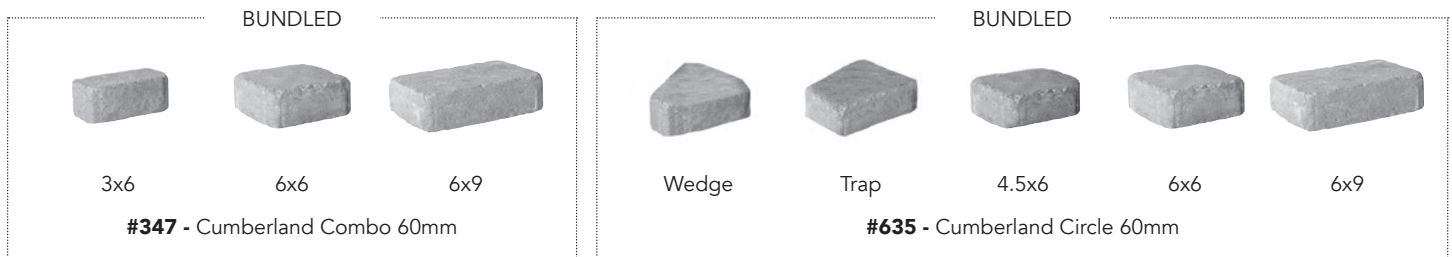

Before specifying a specific product, please confirm availability with your local Keystone Hardscapes producer.

UNIT DIMENSIONS

PRODUCT		DIMENSIONS			PRODUCT #
		Width	Length	Height	
Combo 60mm	3x6	5.91" 150mm	2.95" 75mm	2.36" 60mm	347
	6x6	5.91" 150mm	5.91" 150mm		
	6x9	5.91" 150mm	8.86" 225mm		

PRODUCT		DIMENSIONS			PRODUCT #
		Width	Length	Height	
Circle 60mm	Wedge	6.18" 150mm	6.18" 157mm	2.36" 60mm	635
	Trap	6.18" 150mm	4.21" 107mm		
	4.5x6	6.18" 150mm	4.43" 112.5mm		
	6x6	6.18" 150mm	6.18" 150mm		
	6x9	6.18" 150mm	8.86" 225mm		

FEATURES & BENEFITS

Perfect For:

- Light vehicular applications.
- Made of durable concrete with iron oxide pigments that will not fade with extended UV exposure. Meets or exceeds applicable requirements of ASTM C936.

Ease of Installation

- Joints and surfaces are designed to create a natural look, minimize furniture wobble, and meet ADA gap and lippage requirements.
- Designed to be installed in an efficient repeating runner or ashlar pattern, with equal numbers of 1/2, square, and 3/2 stones.

Aesthetics

- Gently undulating surfaces and edges create the timeless, old-world look of quarried basalt setts.



PATIOS



DRIVEWAYS



POOL DECKS



LIGHT
VEHICULAR

Note: Unit color, dimensions, weight, and availability varies by manufacturer.



INSTALLATION INSTRUCTIONS

STEP 1: Excavate unsuitable, unstable or unconsolidated subgrade material and compact the area which has been cleared. Backfill and level with dense graded aggregate suitable for base material - typically minimum 4-8 inches thick (101.6mm - 203.2mm). Compact base to optimum moisture/density or as otherwise directed by Site Engineer/ Architect/Landscape Architect.

STEP 2: Place bedding course of washed sand conforming to the grading requirements of ASTM C 33 to a maximum uniform depth of 1-inch (25.4mm). Screed to the grade and profile required.

STEP 3: Install Cumberland with joints to a nominal $\frac{1}{8}$ inch (3mm).

STEP 4: Where required, cut pavers with an approved cutting device to fit accurately, neatly and without damaged edges.

STEP 5: Use a low-amplitude plate compactor capable of at least minimum of 4,000 lbf (18 kN) at a frequency of 75-100 Hz to vibrate the pavers into the sand. Remove any cracked or damaged pavers and replace with new units.

STEP 6: Post compaction, spread and sweep dry ASTM C 33 or ASTM C 144 sand over the entire paving area.


STEP 7: Make one more pass with the plate compactor to completely fill the joints with sand.

STEP 8: Sweep paver surface clean for final acceptance by owner/ owner's agent.


NOTE: Colors are shown as accurately as possible in brochures and samples, but due to the nature of the product, regional color differences and variables in print reproduction, colors may not match exactly. For best results in maintaining color consistency, pavers must be installed from several cubes at a time. Efflorescence, a whitish, powder-like deposit, may appear on concrete pavers. This is a natural occurrence in any concrete product and will usually wear off over time.

Complete installation and specification details are available by contacting your Keystone Hardscapes Sales Representative.


TYPICAL CROSS SECTION OF
CONCRETE PAVE STONE INSTALLATION

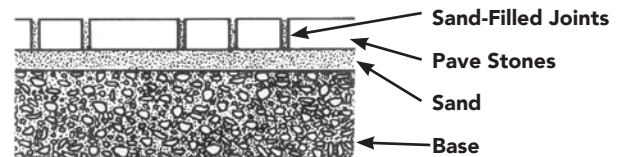


INSTALLATION PATTERNS




3-pc Ashlar 01



3-pc Ashlar 02



3-pc Herringbone

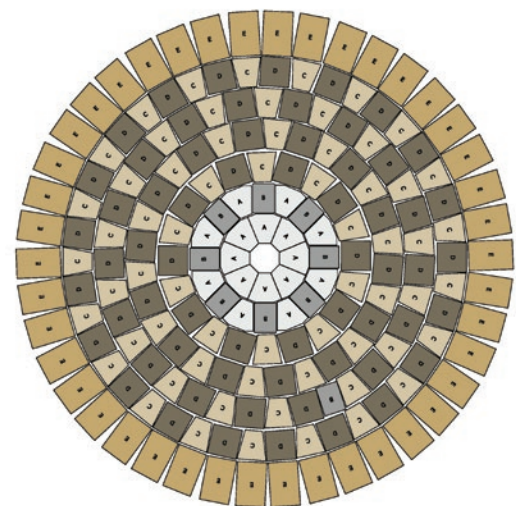

www.keystonehardscapes.com

FOLLOW US

