

# Accessories

## Black Cable Ties

### 76108 - 8" Cable Tie

- Bundle range .062" - 2"
- Tensile strength 50lbs./22kgs.
- Nylon material
- Temperature rated from -40°F to 185°F
- Min. install temperature -4°F
- Flammability rating: UL 94V-2



### 76111 - 11" Cable Tie

- Bundle range .062" - 3"
- Tensile strength 50lbs./22kgs.
- Nylon material
- Temperature rated from -40°F to 185°F
- Min. install temperature -4°F
- Flammability rating: UL 94V-2



### 76114 - 14" Cable Tie

- Bundle range .062" - 4"
- Tensile strength 50lbs./22kgs.
- Nylon material
- Temperature rated from -40°F to 185°F
- Min. install temperature -4°F
- Flammability rating: UL 94V-2



### 76118 - 17" Cable Tie

- Bundle range .062" - 5"
- Tensile strength 50lbs./22kgs.
- Nylon material
- Temperature rated from -40°F to 185°F
- Flammability rating: UL 94V-2



### 76124 - 24" Cable Tie

- Bundle range .19" - 7.2"
- Tensile strength 175 lbs./79 kgs.
- Nylon material
- Temperature rated from -40°F to 185°F
- Flammability rating: UL 94V-2



### 77108 - 8" Cable Tie w/Screw Mount

- Bundle range .062" - 2"
- Tensile strength 50lbs./22kgs.
- Nylon material
- Temperature rated from -40°F to 185°F
- Min. install temperature -4°F
- Flammability rating: UL 94V-2



### 78001 - Cable Mount


- Nylon material
- Temperature rated from -4°F to 185°F
- Flammability rating: UL 94V-2



## Black Cable Ties

Catalog #	Size	Selling Unit
76108	8"	100/bag
76111	11"	100/bag
76114	14"	100/bag
76118	17"	50/bag
76124	24"	50/bag
77108	8" w/Screw Mount	100/bag
78001	Cable Mount	100/bag

- Easy to use ties for landscape lighting on decks or trees, home, electrical, or any fastening needs
- Self-locking, one-piece, low profile head conserves space
- For maximum comfort, smooth rounded edges will not cut hands or insulation
- Available in 8", 11", 14", 17" and 24" sizes
- 8" cable tie available with or without screw mount head
- 1" x 1" adhesive black cable mount available
- Rated for indoor/outdoor use
- Easy to use self-locking ties for many fastening uses
- UV resistant
- Plenum rated AH-2 (76108, 76111, 76114, 77108)

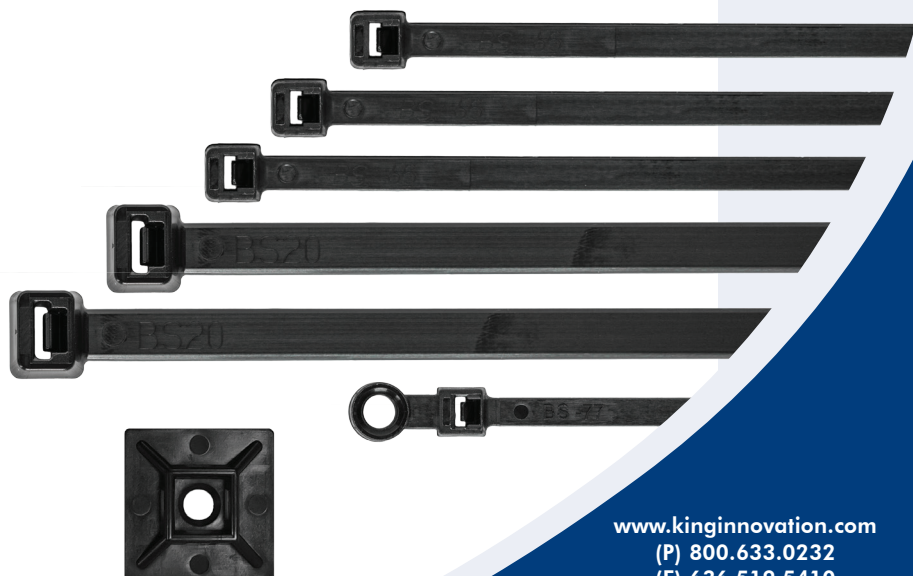

# Accessories

## Nylon Cable Ties

### Nylon Cable Ties

Catalog #	Size	Selling Unit
76003	4"	100/bag
76007	8"	100/bag
76011	11"	100/bag
76015	14"	100/bag

- Raised ridges on bent tip for a sure grip
- Nylon toughness
- UL 94V-2 flammability classification
- Complies with military spec
- Self-locking, one-piece, low profile head conserves space
- Bent tip on all series of cable ties allows easier pick-up insertion, and pull-up
- V-shaped raised ridges on bent tip gives a sure grip and easier pull-up
- Engineered and manufactured for excellent performance
- For maximum comfort, smooth rounded edges will not cut hands or insulation
- Rated for indoor/outdoor use
- Easy to use self-locking ties for many fastening uses
- Plenum rated AH-2

#### 76003 - 4" Cable Tie

Tensile Strength: 18 lbs/8 kgs  
 Max Bundle Diameter: 1"  
 Temperature: Rated from -40°F to 185°F  
 Flammability Rating: UL 94V-2  
 Material: Nylon

#### 76007 - 8" Cable Tie

- Bundle range .062" - 2"
- Tensile strength 50lbs./22kgs.
- Nylon material
- Temperature rated from -40°F to 185°F
- Min. install temperature -4°F
- Flammability rating: UL 94V-2



#### 76011 - 11" Cable Tie

- Bundle range .062" - 3"
- Tensile strength 50lbs./22kgs.
- Nylon material
- Temperature rated from -40°F to 185°F
- Min. install temperature -4°F
- Flammability rating: UL 94V-2



#### 76015 - 14" Cable Tie

- Bundle range .062" - 4"
- Tensile strength 50lbs./22kgs.
- Nylon material
- Temperature rated from -40°F to 185°F
- Min. install temperature -4°F
- Flammability rating: UL 94V-2

