


**SPRING CHECK VALVE—FOOT VALVE**

PVC 1/2# SPRING CHECK VALVE WITH SCREEN  
RATED @200 PSI STATIC PRESSURE @ 72°F  
MOLDED IN THE USA  
MADE OF PVC TYPE I MATERIAL  
EPDM O-RING

IPS FTP X IPS FPT

IPS—IRON PIPE SIZE  
(SAME AS SCH. 40 PIPE)

FPT—FEMALE PIPE THREAD

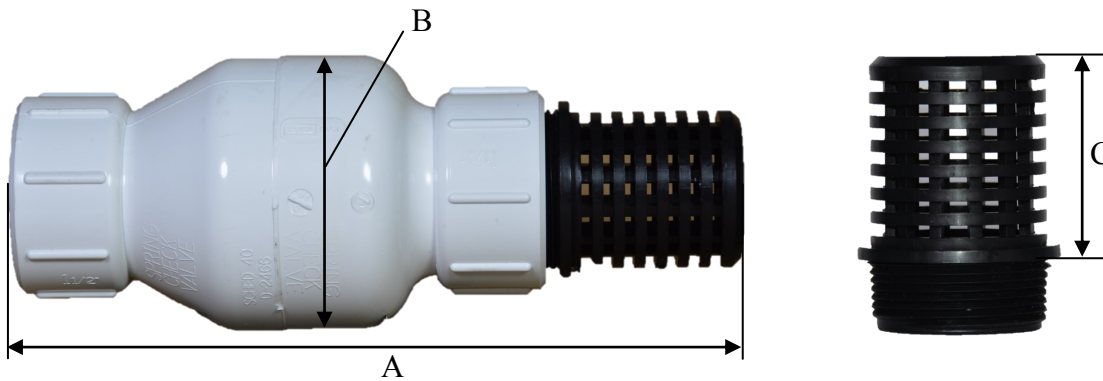

| PART NUMBER | A (INCHES) | B (INCHES) | C (INCHES) | IPS CONNECTION | SCREEN OPENINGS (INCHES)          | WEIGHT (LBS) |
|-------------|------------|------------|------------|----------------|-----------------------------------|--------------|
| 1001-10FV   | 7.00       | 2.31       | 1.82       | 1" FPT         | 0.11 X 0.21                       | 0.40         |
| 1001-12FV   | 8.22       | 3.20       | 2.24       | 1 1/4" FPT     | 0.09 x VARIES BETWEEN 0.30 & 0.45 | 0.80         |
| 1001-15FV   | 8.36       | 3.21       | 2.14       | 1 1/2" FPT     | 0.10 X 0.28                       | 0.85         |
| 1001-20FV   | 10.35      | 4.06       | 2.65       | 2" FPT         | 0.10 X 0.40                       | 1.50         |

NOTE: LENGTH VARIES WITH TIGHTNESS OF SCREEN