



WATER TRAILERS

The industry's best
water trailers.



500 Gallon Capacity with Centrifugal Pump

- **High capacity polyethylene tank** holds 500 gallons of water.
- **Simple water flow controls** combined with reliable Multiquip pumps ensure problem free operation.
- **Smooth highway and job site towing** assured by a dual axle design with ample ground clearance to negotiate rugged terrain.
- **Brake actuator options** included electric and hydraulic surge systems. Height adjustable channel permits multiple hitch options.
- **Made in the U.S.A.**

Quick Fill System — fill tank from fire hydrants through 2" diameter steel pipe

Industrial grade valves, solid brass discharge ports and quick-disconnect (cam and groove) couplings — designed to operate under the most demanding conditions



Inline water surge chamber provides relief against pressure spikes

Rear spray bar delivers efficient water distribution with coverage up to 6 x 28 ft. area

Easy selected water delivery options — two levers direct all manifold water management and infinite flow controls

Standard Water Trailers

WT5C — Includes QP2H centrifugal pump, 2" suction hose and 2" discharge hose; trailer equipped with hydraulic brakes, 2-5/16" ball hitch, 4-pin wiring connector

WTE5C — Includes QP2H centrifugal pump, 2" suction hose and 2" discharge hose; trailer equipped with electric brakes, 2-5/16" ball hitch, 7-pin wiring connector



Steel bin provides convenient storage for hose and accessories




Optional hose reel assembly



Single lever control of suction and discharge functions — multiple ports provide flexible water delivery options and convenient tank filling

500 Gallon Capacity with High Pressure Pump

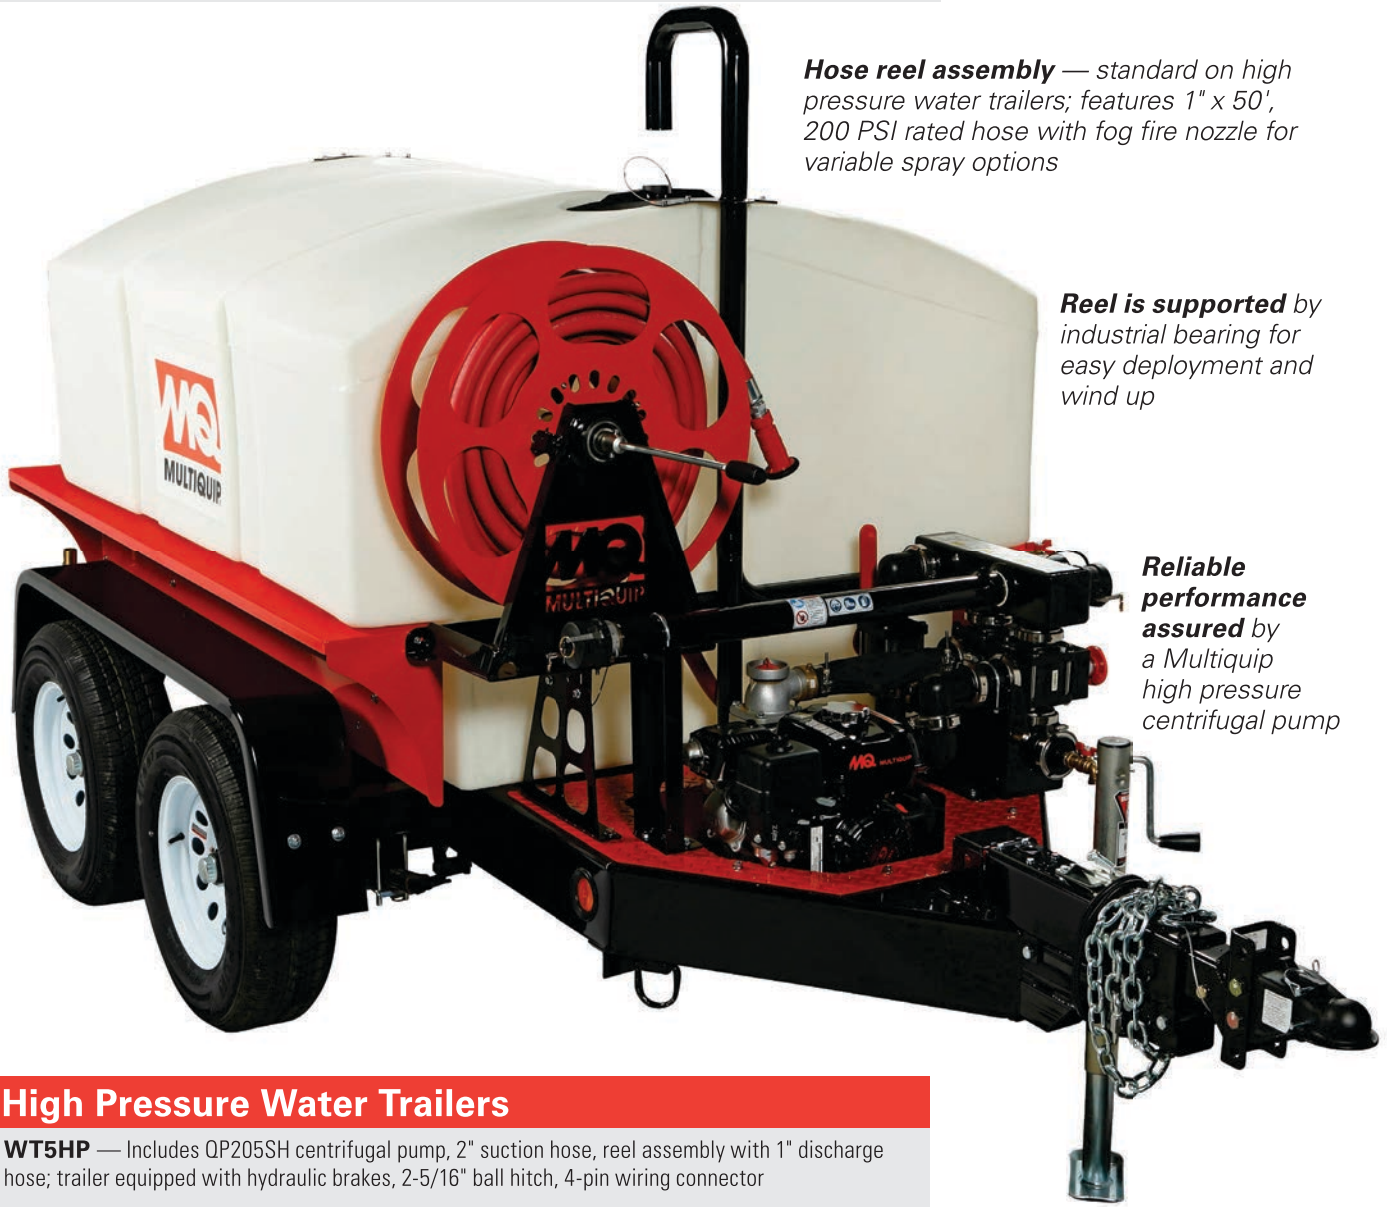

Hose reel assembly — standard on high pressure water trailers; features 1" x 50', 200 PSI rated hose with fog fire nozzle for variable spray options

Reel is supported by industrial bearing for easy deployment and wind up

Reliable performance assured by a Multiquip high pressure centrifugal pump


High Pressure Water Trailers

WT5HP — Includes QP205SH centrifugal pump, 2" suction hose, reel assembly with 1" discharge hose; trailer equipped with hydraulic brakes, 2-5/16" ball hitch, 4-pin wiring connector

WTE5HP — Includes QP205SH centrifugal pump, 2" suction hose, reel assembly with 1" discharge hose; trailer equipped with electric brakes, 2-5/16" ball hitch, 7-pin wiring connector



Rear spray bar is capable of producing a cone of water from 8ft. (gravity feed) to 16 x 62 ft. spray area (pressurized flow)

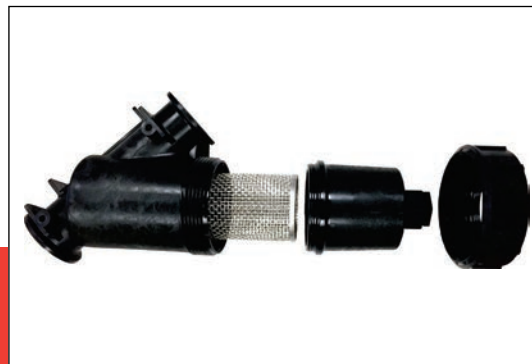

In-line, easy maintenance screen filter system prevents clogging of high pressure pump

800 Gallon Capacity with Centrifugal Pump

Quick Fill System — fill tank from fire hydrants through 2" diameter steel pipe

Industrial grade valves, solid brass discharge ports and quick-disconnect (cam and groove) couplings — designed to operate under the most demanding conditions



Water pump set within the frame, providing added protection from damage

- **High capacity polyethylene tank** holds 800 gallons of water.
- **Simple water flow controls** combined with reliable Multiquip pumps ensure problem free operation.
- **Smooth highway and job site towing** assured by a dual axle design with ample ground clearance to negotiate rugged terrain.
- **Brake actuator options** included electric and hydraulic surge systems. Height adjustable channel permits multiple hitch options.
- **Made in the U.S.A.**

New tank shape is designed to be stronger to hold the extra water weight

Rear spray bar delivers efficient water distribution with coverage up to 6 x 28 ft. area

Easy selected water delivery options — switch between suction and discharge simply by turning a lever

Standard Water Trailers

WT8C — Includes QP2HLF centrifugal pump, 2" suction hose and 2" discharge hose; trailer equipped with hydraulic brakes, choice of 2-5/16" ball hitch, 2-5/16" Bulldog ball hitch, or 3" Pintle Eye; wiring connector

WT8CHR — Includes QP2HLF centrifugal pump, 2" suction hose and 2" discharge hose; trailer equipped with hydraulic brakes, choice of 2-5/16" ball hitch, 2-5/16" Bulldog ball hitch, or 3" Pintle Eye; wiring connector; hose reel

WTE8C — Includes QP2HLF centrifugal pump, 2" suction hose and 2" discharge hose; trailer equipped with electric brakes, choice of 2-5/16" ball hitch, 2-5/16" Bulldog ball hitch, or 3" Pintle Eye; wiring connector

WTE8CHR — Includes QP2HLF centrifugal pump, 2" suction hose and 2" discharge hose; trailer equipped with electric brakes, choice of 2-5/16" ball hitch, 2-5/16" Bulldog ball hitch, or 3" Pintle Eye; wiring connector; hose reel



Steel bin provides convenient storage for hose and accessories



Hose reel comes standard on WT8CHR and WTE8CHR; also can be sold separately



Single lever control of suction and discharge functions — multiple ports provide flexible water delivery options and convenient tank filling

800 Gallon Capacity with High Pressure Pump

Hose reel assembly — standard on high pressure water trailers; features 1" x 50', 200 PSI rated hose with fog fire nozzle for variable spray options

Reel is supported by industrial bearing for easy deployment and wind up

Reliable performance assured by a Multiquip high pressure centrifugal pump




High Pressure Water Trailers

WT8HP — Includes QP205SHLF centrifugal pump, 2" suction hose, reel assembly with 1" discharge hose; trailer equipped with hydraulic brakes, choice of 2-5/16" ball hitch, 2-5/16" Bulldog ball hitch, or 3" Pintle Eye; wiring connector

WTE8HP — Includes QP205SHLF centrifugal pump, 2" suction hose, reel assembly with 1" discharge hose; trailer equipped with electric brakes, choice of 2-5/16" ball hitch, 2-5/16" Bulldog ball hitch, or 3" Pintle Eye; wiring connector



Rear spray bar is capable of producing a cone of water from 8ft. (gravity feed) to 16 x 62 ft. spray area (pressurized flow)

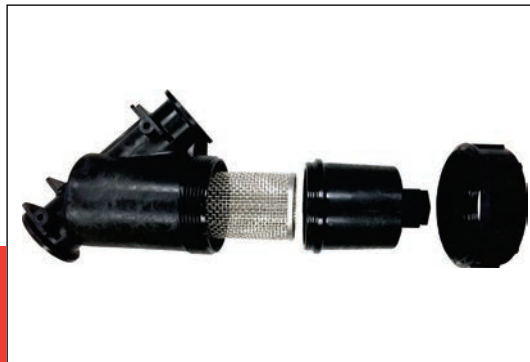

In-line, easy maintenance screen filter system prevents clogging of high pressure pump

Accessories

Suction Hose (reinforced PVC) — (Male/Female NPT Thread Couplers)	
HS1520	1.5" / 20 ft. / 90 psi
HS1525	1.5" / 25 ft. / 90 psi
HS220	2" / 20 ft. / 75 psi
HS225	2" / 25 ft. / 75 psi
Suction Hose (reinforced PVC) — (Male & Female Cam & Groove Lock Couplers)	
HSQ1520	1.5" / 20 ft. / 90 psi
HSQ220	2" / 20 ft. / 75 psi
HSQ225	2" / 25 ft. / 75 psi
Discharge Hose (flat PVC) — NPT thread	
HD1550	1.5" / 50 ft. / 75 psi
HD250	2" / 50 ft. / 75 psi
Discharge Hose (flat PVC) — (Male & Female Cam & Groove Lock Couplers)	
HDQ1550	1.5" / 50 ft. / 75 psi
HDQ250	2" / 50 ft. / 75 psi
Discharge Hose — 2.5" Female Fire hydrant thread coupler, 2" x 25' Mill Hose and 2" Female Cam & Groove Lock Coupler	
HDFNST	25 ft. / 200 psi
Male Cam & Groove Lock Couplers — Male quick-disconnect (Q/D) coupler, Female NPT Thread	
A150A	1.5" Male Q/D to 1.5" Female NPT thread
A200A	2" Male Q/D to 2" Female NPT thread
Fire Fog Nozzle — 1.5" diameter, Female NPT thread	
FIRENOZ15	1.5" Adjustable fog nozzle
Hose Reel Assembly	
WT5HR	Includes industrial Reel Assembly, 1" x 50' 200 psi discharge hose, fire fog nozzle, all couplers and hardware to mate with the main manifold water control system. Compatible with WT5C and WTE5C
WTHR	Includes industrial Reel Assembly, 1" x 50' 200 psi discharge hose, fire fog nozzle, all couplers and hardware to mate with the main manifold water control system. Compatible with WT8C and WTE8C
Hitches/Couplers	
29228	Coupler, 2" ball, 8K.. Compatible with 500 gallon water trailers only (WT5C, WTE5C, WT5HP, WTE5HP)
29369	3" pintle eye, 14K
EE57033	Coupler, Bulldog,, 2" ball, adjustable channel mount, 7K. Compatible with 500 gallon water trailers only (WT5C, WTE5C, WT5HP, WTE5HP)
EE56638	Coupler, Bulldog, 2-5/16" ball, adjustable channel mount, 12.5K
EE43253	Coupler, 2-5/16" ball, 14K

Specifications — 500 gallon models

	WT5C/WTE5C*	WT5HP/WTE5HP**
Engine		
Model	Honda GX120	Honda GX160
Power - Net Prime HP	3.5	4.8
Fuel Tank Gal.	0.66	0.9
Fuel Consumption GPH	0.18	0.46
Operating Speed RPM	3,600	3,600
Pump		
Make	Multiquip	Multiquip
Model	QP2H (modified)	QP205SH (modified)
Type	2" Centrifugal	2" Centrifugal High Pressure
Max Flow GPM	158	106
Max Head Ft.	115	230
Water Tank		
Type	Industrial Grade	
Style	Rotomolded	
Fill Port	12" vented port	
Material	Polyethylene — 1/4"	
Fill Rate	Five minutes full fill @ full throttle	
Capacity Gal.	Up to 525	
Water Operations		
Delivery Methods	Pressurized 1.5" and 2" left / 2" right; Two pressurized rear spray nozzles; Two standard garden hose adapters (upper adapter/pressurized; lower adapter/drain only); 1" x 50 ft. mounted hose reel***	
Fill Methods	Municipal fire hydrant — QD; 1.5" and 2" Q/D cam and groove; Two standard garden hose adapters	
Trailer and Frame		
Material	Formed steel channel frame	
Number of Axles	2	
Capacity — Axle Rating lb.	3,500	
Tires	ST205/75D 14"	
Brakes	*Hydraulic actuated drum brakes (WT5C); Electric brakes (WTE5C)	**Hydraulic actuated drum brakes (WT5HP); Electric brakes (WTE5HP)
Hitch	2-5/16" Ball Standard	
Jack Ratings lb.	2,000	
Hose Bin	Formed steel enclosure	
Hose Kit	2" x 20 ft. Suction (HSQ220) 2" x 50 ft. Discharge (HDQ250)	2" x 20 ft. Suction (HSQ220) 1" x 50 ft. 200 psi Hose Reel (WT5HR)
Size and Weight		
Dimensions LxWxH in.	146 x 68 x 80	146 x 68 x 80
Trailer Weight DRY lb.	1,530	1,630
Trailer Weight WET lb.	5,835	6,020

*** Models WT5HP, WTE5HP only. Not included with models WT5C and WTE5C.

Specifications — 800 gallon models

	WT8C/WTE8C/WT8CHR/WTE8CHR	WT8HP/WTE8HP
Engine		
Model	Honda GX120	Honda GX160
Power - Net Prime HP	3.5	4.8
Fuel Tank Gal.	0.66	0.9
Fuel Consumption GPH	0.18	0.46
Operating Speed RPM	3,600	3,600
Pump		
Make	Multiquip	Multiquip
Model	QP2H (modified)	QP205SH (modified)
Type	2" Centrifugal	2" Centrifugal High Pressure
Max Flow GPM	158	106
Max Head Ft.	115	230
Water Tank		
Type	Industrial	
Style	Rotomolded — seamless	
Fill Port	12" vented port	
Material	Polyethylene — 3/8" wall	
Fill Rate	5 min./fill	6 min./fill
Capacity Gal.	800 gal.	
Water Operations		
Delivery Methods	Pressurized 1.5" and 2" left / 2" right; Two pressurized rear spray nozzles; Two standard garden hose adapters (upper adapter/pressurized; lower adapter/drain only); 1" x 50 ft. mounted hose reel*	
Fill Methods	Municipal fire hydrant — QD; 1.5" and 2" Q/D cam and groove; Two standard garden hose adapters	
Trailer and Frame		
Material	Formed steel channel frame	
Number of Axles	2	
Capacity — Axle Rating lb.	5,200	
Tires	ST225/75D 15"	
Brakes	Hydraulic surge (WT8C/WT8CHR) Electric-actuated drum brakes (WTE8C/WTE8CHR)	Hydraulic surge (WT8HP) Electric-actuated drum brakes (WTE8HP)
Hitch	2-5/16" Ball Hitch, 2-5/16" Bulldog ball hitch, or 3" Pintle Eye	
Jack Ratings lb.	2,000	
Hose Bin	Formed steel enclosure	
Hose Kit	2" x 20' Suction (HSQ220) 2" x 50' Discharge (HDQ250)	2" x 20' Suction Hose Kit (HSQ220) 1 x 50' hose reel assembly (WTHR)
Size and Weight		
Dimensions LxWxH in.	142.5 x 69.5 x 80	142.5 x 69.5 x 80
Trailer Weight DRY lb.	2,200	
Trailer Weight WET lb.	9,100	

* Models WT8HP, WTE8HP, WT8CHR and WTE8CHR only. Not included with models WT8C and WTE8C.

