

DriBOND™

CHANGING THE WAY YOU OVERLAY

- Ideal for thin paver overlays
- Driveways, pool decks, patios and walkways
- Dry application
- Polymer-modified
- No mixing - ready to use
- Reduces installation time
- Cost Efficient



No More Concrete Removal!

ADVANCED DRY MUDSET FOR CONCRETE OVERLAYS

DriBond™ is specially designed for the overlay of thin pavers [1" or 30mm] or natural stone over existing concrete. With DriBond™, there is no need to remove the existing concrete substrate, which is a costly and time-consuming process. DriBond™ can be installed quickly and easily over most sound concrete surfaces.

Homeowners now have the option of having their old concrete driveway, pool deck or patio transformed into a hardscape masterpiece within one to two days. DriBond makes the installation of pavers possible for a fraction of the cost needed to tear out existing concrete and replace it with a traditional sand-set paver installation.

Over one million square feet of thin pavers have been installed over the past seven years utilizing the DriBond™ technology.

Specifications:

Bag Weight: 50lbs / 22.7 kg

Bag Coverage Rate: Approx. 30 to 35 sq. feet [at depth of 3/8"]

ASTM C579, Compressive Strength: 6,850 psi

ASTM C666, Freeze Thaw Ratio: 94% *

ASTM C308, Final Set-Time: 5:40

Maximum Depth: 1"

Maximum Variance: 5/8"


An updated technical data sheet can be found at techniseal.com.

** Note: For installations in freeze-thaw regions, please contact Techniseal.*

Contact your local Techniseal® representative, visit techniseal.com or dial 800 465-7325 for more details

 **Techniseal®**
Protect and Beautify

Transform existing concrete surfaces into beautiful landscape masterpieces, in less than 48 hours!

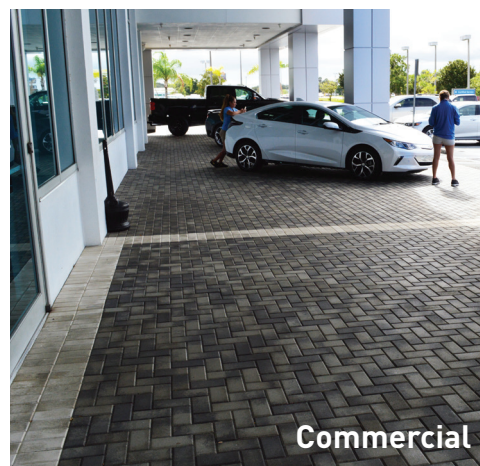

TYPICAL CROSS SECTION

