

## PT-PTH1 Installation Instructions

### SAVE THESE INSTRUCTIONS

#### WARNING – TO REDUCE THE RISK OF FIRE OR INJURY TO PERSONS:


- Turn power OFF or unplug fixture and allow it to cool before replacing lamp.
- Lamp gets HOT quickly. Contact only switch/plug when turning on.
- Do not touch hot lens, guard, or fixture housing until it has cooled.
- Keep lamp away from combustibles.
- Do not touch halogen lamp. Use a soft cloth. Oil from skin may damage lamp.
- Do not operate the fixture fitting with a missing or damaged shield.

#### IMPORTANT SAFETY INSTRUCTIONS

- For outdoor use only.
- Make sure the power is turned OFF before installing or servicing this fixture.
- WARNING: Risk of electrical shock. Install all fixtures 10 feet (3.05 m) or more from a pool, spa, or fountain.
- This fixture is to be used with a low voltage power supply that does not exceed 15V.
- Position the wire and wire connector so that is connected within 6 inches (15.2 cm) from a building structure, a fixture or fitting.
- Not to be buried except for a maximum of 6 inches to connect to the main low voltage cable.

#### LAMP INSTALLATION/REPLACEMENT INSTRUCTIONS

- 1) Unscrew lens assembly and shade from stem.
- 2) Insert T3 bi-pin lamp with correct wattage as marked on fixture label.
- 3) Screw the shade/lens assembly to the stem.

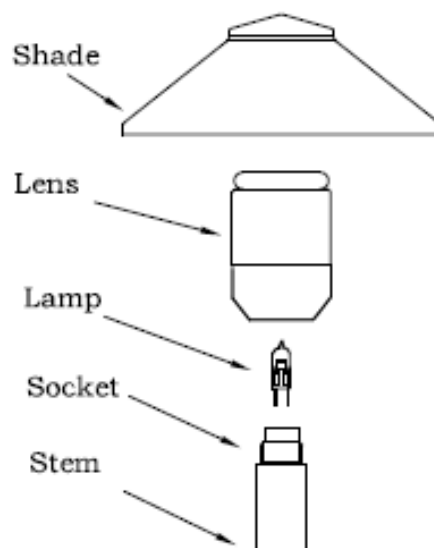

## FIXTURE MOUNTING INSTRUCTIONS

- 1) Disconnect transformer from main power supply.
- 2) Attach the top of the lens assembly to the path light shade by threading the small hole on the lens assembly with the shade screw and rotating the lens clockwise to the shade.
- 3) Insert T3 bi-pin lamp (max 20W) into socket.
- 4) Screw the shade/lens assembly to the stem.
- 5) Run lead wire from fixture through the ground stake mounting hole.
- 6) Insert composite ground stake in desired location until flange of stake is flush to grade.
- 7) Screw stem into top of stake and tighten until snug.
- 8) Strip the two fixture lead wires and connect them to the main low voltage supply cable lead with waterproof wire connectors.

