- **Easy to Install**
  Unmatched tube flexibility allows for tighter turns with fewer elbows to install.
- **Durable**
  Clog-resistant emitters and a tube that withstands UV and chemical exposure means long-lasting, low maintenance installations.
- **Convenient**
  Colored stripes and laser etching on the tube allow for easy emitter flow rate and spacing identification. New labels include maximum lateral run length.
- **Efficient**
  XFS dripline is compatible with Rain Bird's QF Dripline Header and XF Series Insert Fittings with FITINS Tool – a system solution that maximizes productivity.

XFS Sub-Surface Dripline

New Look - Same Great Performance

LOOK FOR THE COPPER-COLORED TUBING

Rain Bird® XFS Sub-Surface Copper-Colored Dripline with Copper Shield™ Technology is the latest innovation in the Rain Bird Landscape Drip Family. Rain Bird's patent-pending Copper Shield Technology protects the emitter from root intrusion, creating a long-lasting, low maintenance sub-surface drip irrigation solution for use under turf grass or shrub and groundcover areas. A proprietary tubing material makes the XFS Sub-Surface Dripline the most flexible tubing in the industry, and the easiest sub-surface dripline to design with and install.

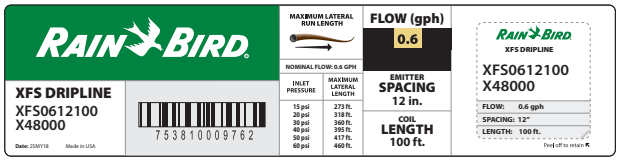

New XFS Dripline Coil Labels

- Easier to read
- Useful jobsite information
- Peel off inset label to place in valve box or controller for future tubing identification

New Product Features

- Easy to read laser etched information on the tube
- Round emitter outlet holes
- Colored stripes designate flow rate
  Black = 0.9 gph
  Tan = 0.6 gph
  Green = 0.4 gph

Customer Satisfaction Policy

- Rain Bird's XF Series Dripline warranty includes five (5) years on product workmanship and seven (7) years on environmental stress cracking

XFS Dripline Models

Copper Color Tube

- XFS0412500
- XFS0418500
- XFS0612100
- XFS0612500
- XFS0618100
- XFS0618500
- XFS0912100
- XFS0912500
- XFS0918100
- XFS0918500

XF Blank tubing also available in brown, purple, and purple stripe colors

Purple Color Tube

- XFSP0412500
- XFSP0418500
- XFSP0612500
- XFSP0618500
- XFSP0912500
- XFSP0918500

Purple Stripe Tube

- XFSPS04125
- XFSPS04185
- XFSPS06125
- XFSPS06185
- XFSPS09125
- XFSPS09185

How to Specify

XFS - 06 - 12 - 100

Coil Length (100 Feet)

Emitter Spacing (12" inches)

Flow Rate (0.6 GPH)

Model
XFSP = Purple tube
XFSPS = Purple stripe tube

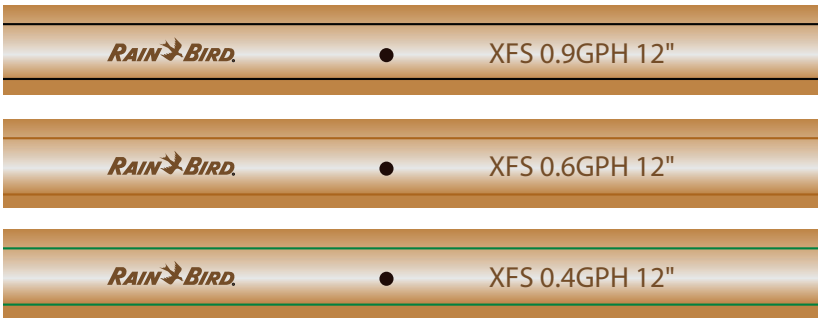

NEW colored stripes designate flow rates.

The continuous flushing action of the XFS emitter and the grit tolerant, clog-resistant design ensures that water will keep flowing thus minimizing maintenance and saving you time and money.

A low-profile emitter design results in reduced friction loss, allowing longer maximum lateral runs and more cost-effective system designs.

For more information on XFS visit:
www.rainbird.com/professionals/products/dripline

XF Dripline with Greater Flexibility
Flexible, pressure compensating inline emitter tubing allows for tighter turns with fewer fittings to install.

LEED Compliant

Contains at least 20% post consumer recycled polyethylene which qualifies for LEED credit 4.2

®Registered trademark of Rain Bird Corporation
© 2019 Rain Bird Corporation 0619 D40214C