




# VILLAGIO

**DESCRIPTION:** Paver **TEXTURE:** Beveled

## PALLET OVERVIEW



The Villagio paver allows for gentle curves and winding pathways, eliminating the need for cuts.

## NOTES

See page 60 to 62 for more technical information. When used in a permeable pavement application, see page 99 to 104 for more technical information.


See page 29 for more information about applications.

**JOINT WIDTH:** 3/8" TO 9/16" ( 9 TO 15 mm)  
**% OF SURFACE OPENING:** 8.0 %  
**INFILTRATION RATE:** 896 in./hr  
 (22 750 mm/hr)

Specifications per pallet	Imperial	Metric
Cubing	<b>117 ft<sup>2</sup></b>	10.88 m <sup>2</sup>
Approx. Weight	3 029 lbs	1 374 kg
Number of rows	11	
Coverage per row	10.64 ft <sup>2</sup>	0.99 m <sup>2</sup>
Linear coverage per row	24.94 lin. ft	7.61 lin. m

	Unit dimensions	in	mm	Units/pallet
<b>A</b>	Height	2 3/8	60	77 units
	Width	5 1/8	130	
	Length	5 1/8	130	
<b>B</b>	Height	2 3/8	60	77 units
	Width	5 1/8	130	
	Length	6 5/16	160	
<b>C</b>	Height	2 3/8	60	154 units
	Width	5 1/8	130	
	Length	7 5/16	185	
<b>D</b>	Height	2 3/8	60	154 units
	Width	5 1/8	130	
	Length	8 7/16	215	

01 | Linear pattern    02 | Herringbone pattern    03 | Herringbone pattern    04 | Herringbone pattern

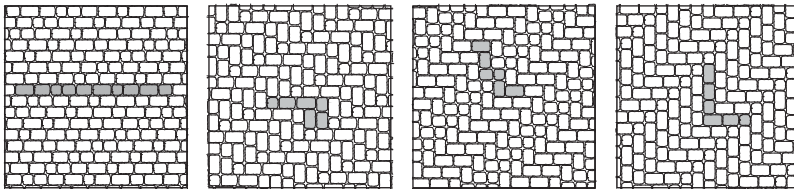

Patterns are for design inspiration only. The installer is responsible to calculate & purchase the correct amount of material.

