



Type:

Model:

Project:

# SPECIFICATION SHEET

## MODEL 4018 Landscape Series • Specialty Lights

### FIXTURE SPECIFICATIONS:

**HOUSING:**

Stamped 20-gauge brushed, top grade domestic, 304 stainless steel.

**STEM:**

Heavy gauge, adjustable, nickel plated stainless steel tubing.

**FINISH:**

Natural, brushed stainless steel housing & aluminum base with nickel plated stem.

**LENS:**

Frosted, high-impact, polycarbonate lens.

**LAMP TYPE:**

High Output LED with Vista exclusive smart-driver, powered to operate for 50,000 hours.

**ELECTRICAL:**

Input voltage range 6-15V AC, regulated to achieve uniform illumination throughout cable run of fixtures. Integral surge & reverse polarity protection.

**MOUNTING:**

Bottom of stem threaded into CNC-machined solid aluminum, nickel-plated mounting canopy.

**FASTENERS:**


All fasteners are stainless steel.

**WIRING:**

Prewired with a 3' pigtail of 18-2 direct-burial cable & underground connectors for a secure connection to supply cable. Optional hardwired on/off switch available.

All Vista luminaires are **MADE IN U.S.A.**

### DIMENSIONS:

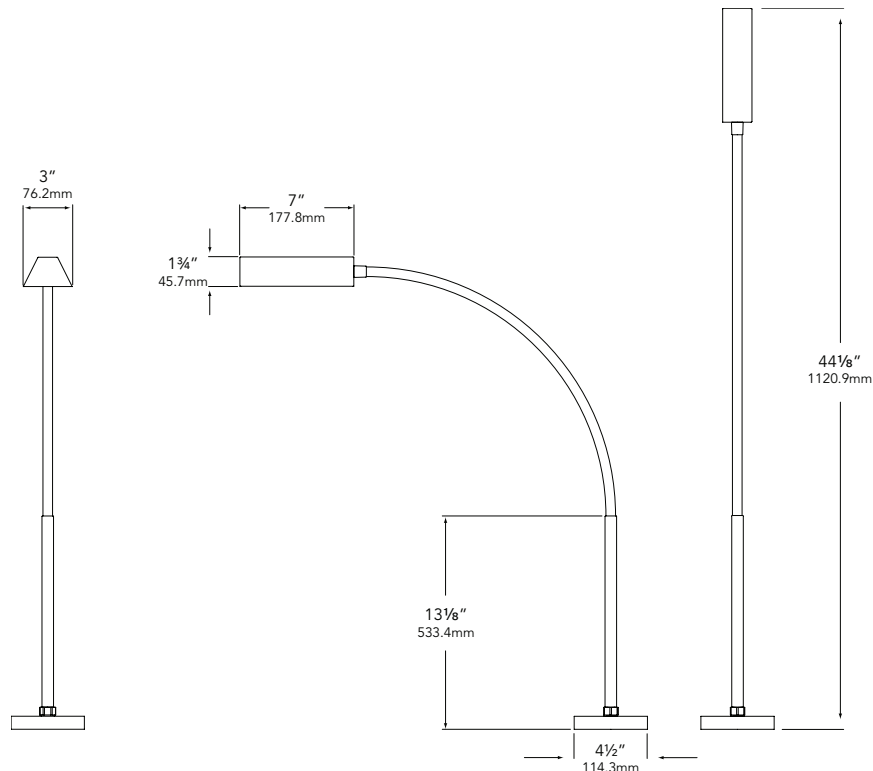

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



# SPECIFICATION SHEET

## MODEL 4018 Landscape Series • Specialty Lights

### FIXTURE ORDERING INFORMATION

TO ORDER FIXTURE: Select appropriate choice from each column as in the following example.

**EXAMPLE: FL-4018-N-LC5ND**

MOUNTING	MODEL	FINISH	LAMP / LED
FL - Flexible stem with solid CNC-machined aluminum mounting base	4018	N - Nickel plated stainless steel and aluminum	LC5ND - 5 watts  LED - Group C Emitter Qty - 3 Distribution - Non-directional Temperature - Neutral (N) Operating voltage range - 6 to 15V.  <i>(Please see lamp order code column on lamp guide, Vista product catalog.)</i>

Fixtures shipped with standard lamp, unless otherwise specified.