


Automatic Flush Valve

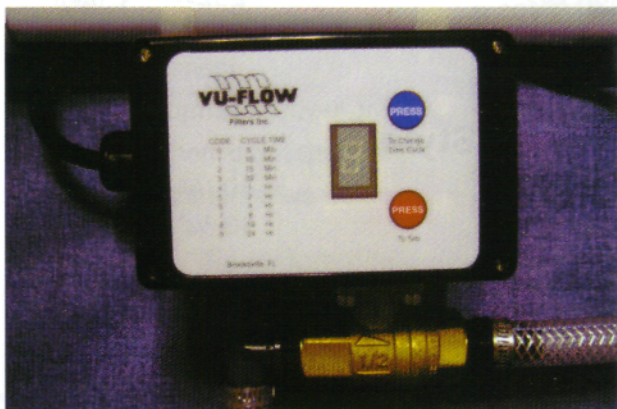

Model No.


AFV
AFV-KIT

AFV-KIT Includes:

- (2) 1/2" Barb x 1/2" NPT male hose fittings
- (2) SAE size 8 SS worm drive clamps
- (24") 1/2" braid reinforced flexible PVC tubing. (rated at 215 PSI)

Kit does not include filter or automatic flush valve.

Please note: To insure optimum performance of automatic flush valve, it is recommended that you use the above rated tubing only.

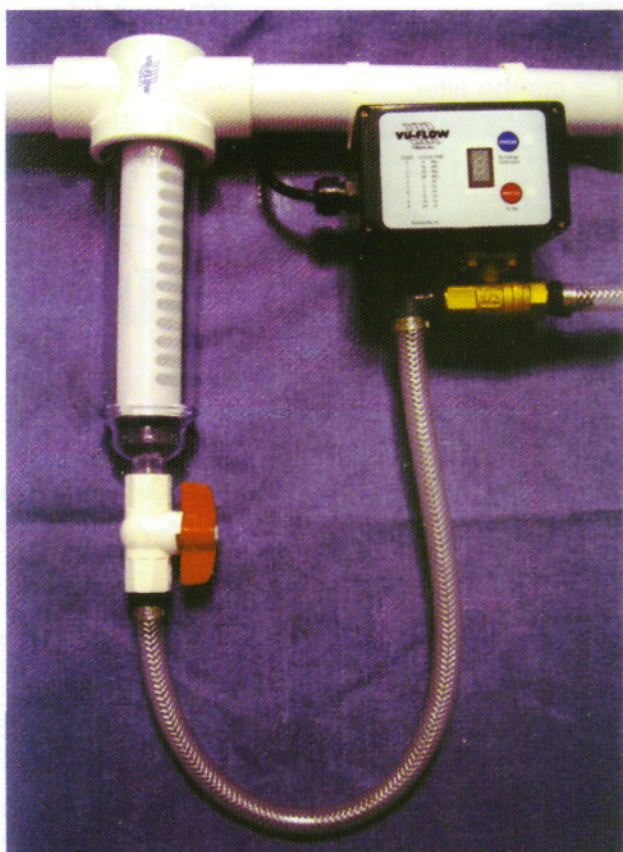

SPECIFICATIONS

Adjustable cycle time.....	5 min. - 24 hours
Working Pressure.....	200 PSIG
Ambient Temperature.....	35°F to 165°F
Enclosure	Nema 4
Voltage.....	115V, 1 Phase, 60HZ
Current.....	2.5 Amps
Valve Construction.....	Brass
Seals.....	Reinforced Teflon
Discharge Volume	1/2" NPT-.92 (Gal per cycle @ 30 PSIG)
Power cord.....	8 ft. heavy-duty grounded
Full-Port Ball Valve	1/2" NPT
Discharge Time	3.5 seconds (Non-Adjustable)