



# OPERATOR'S MANUAL



## 6x4 Utility Vehicle

Brush Guard

39A-104-100

**IMPORTANT: READ SAFETY RULES AND INSTRUCTIONS CAREFULLY**

**CUB CADET LLC P.O. BOX 361131 CLEVELAND, OHIO 44136-0019**


## Assembling Brush Guard

- The front brush guard will be attached to the front bumper assembly. See Illustrated Parts.
- Align the brush guard with the holes on the front bumper.
- Insert hex cap screws, flat washers, and lock nuts into the horizontal and vertical holes.
- Secure hardware in place.

## Calling Customer Support

If you have difficulty assembling this product or have any questions regarding the controls, operation or maintenance of this unit, please call the Customer Dealer Referral Line. Call **1-877-282-8684** to reach the Customer Dealer Referral Line. Please have your unit's model number and serial number ready when you call.

## Illustrated Parts

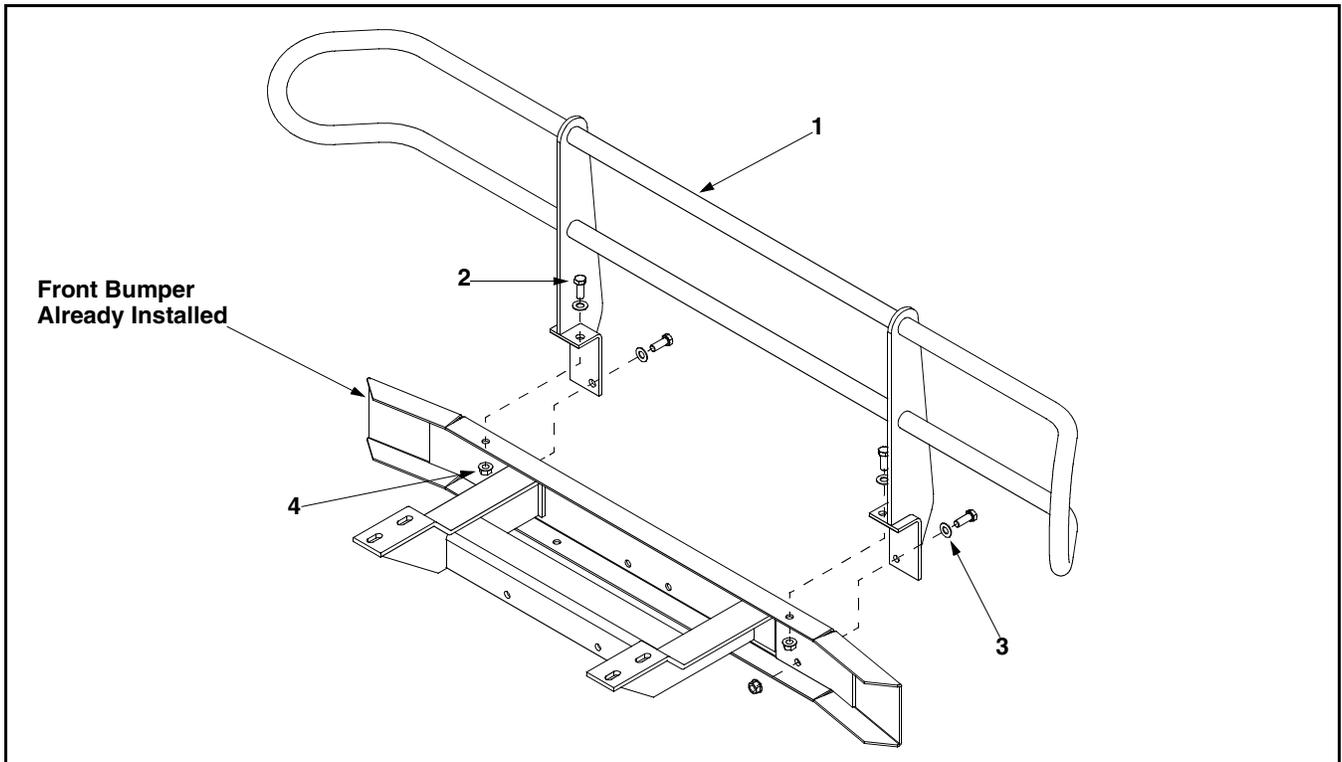

REF. NO.	PART NO.	DESCRIPTION
1.	607-04010	Front Brush Guard
2.	710-0514	Hex Cap Screw 3/8-16 x 1.0
3.	736-3050	Flat Washer .406 ID x .812 OD
4.	712-0431	Flange Lock Nut 3/8-16