



**PROFESSIONAL
OUTDOOR LIGHTING**

Type:

Model:

Project:

SPECIFICATION SHEET

Model MT (Multi-Tap) • Landscape Series • Transformers

TRANSFORMER SPECIFICATIONS:

EXTERIOR CONSTRUCTION:

20-gauge polished, top-grade domestic, 304 stainless steel.

NEMA ENCLOSURE RATING: 3R

FINISH:

Polished stainless steel with Smudge-Free clear powder-coat.

TRANSFORMER CHARACTERISTICS:

Available Power Ratings: 300, 600, 900, and 1200 Watts

Primary Voltage: 120 Volts (Also available in 208V, 230V or 277V, 50 or 60 cycle - Special order only.)

Secondary Voltage: 11, 12, 13, 14, and 15 Volts

Fully grounded and isolated with encapsulated core and coil.

TERMINALS:

Extra-large terminal strip for multiple low voltage cable connections. A separate 120-volt terminal strip for easy hard-wiring and accessory terminal strip for easy installation of external switching devices also included.

PRIMARY PROTECTION:

Auto thermal shut-off.

SECONDARY PROTECTION:

Resettable high performance magnetic circuit breaker.

WIRING:

6-foot, heavy-gauge, grounded, water-resistant power cord with integrally molded plug.


CERTIFICATION:

UL Listed to U.S. and Canadian safety standards for landscape lighting transformers (UL 1838). Pool & Spa Ready - Suitable for Use with Submersible Luminaires or Submersible Pumps (power cord must be shortened to a 3-foot maximum length - see Installation Instructions).

All Vista transformers are **MADE IN THE U.S.A.**



DIMENSIONS:

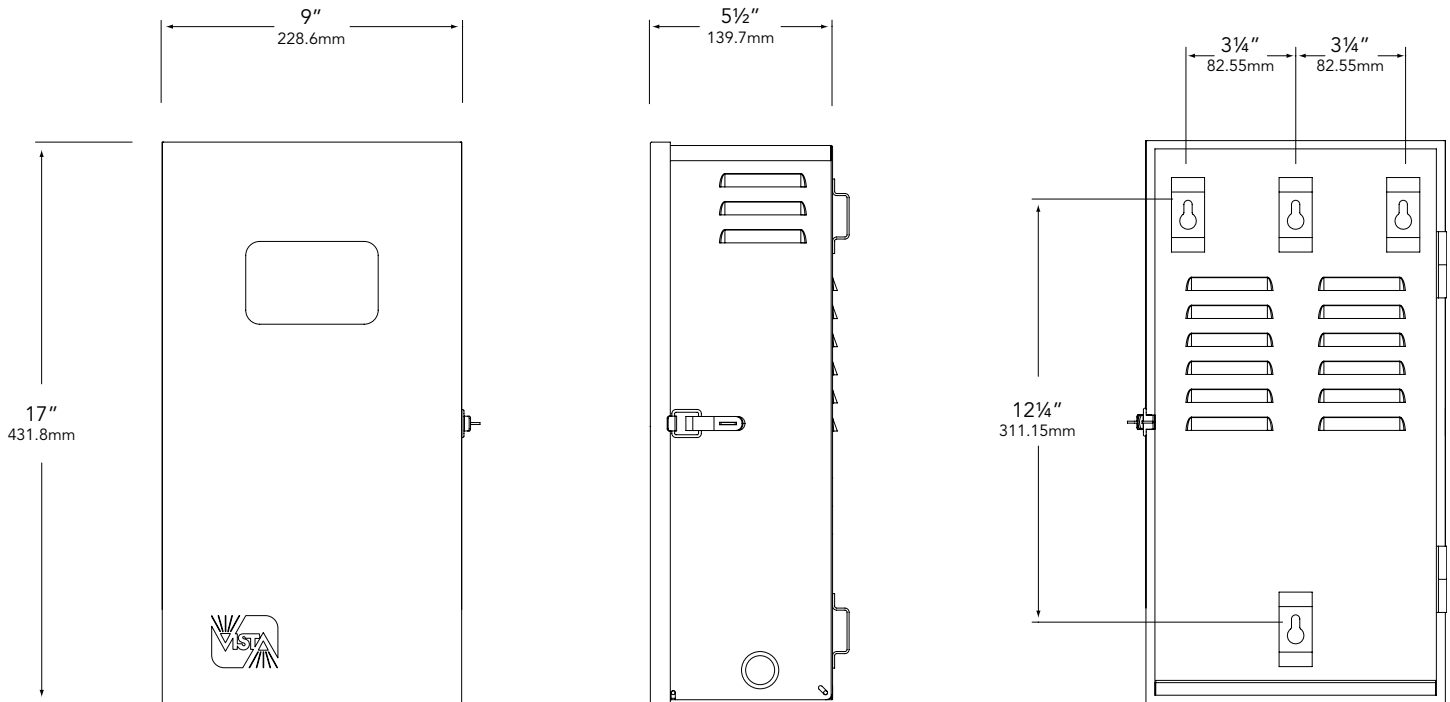

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



SPECIFICATION SHEET

Model MT (Multi-Tap) • Landscape Series • Transformers

TRANSFORMER ORDERING INFORMATION

TO ORDER TRANSFORMER: Select appropriate choice from each column as in the following example.

EXAMPLE: MT-600-DT-C

MODEL	TRANSFORMER MODEL	ACCESSORY OPTIONS	FINISH
MT- Multi-Tap	300- 300 VA, DA 600- 600 VA (300 W x 2), DA 900- 900 VA (300 W x 3) 1200- 1200 VA (300 W x 4)	T- Removable multi-setting mechanical 24-hour timer DT- Removable multi-setting digital 7-day timer RP- Remote wired photocell with electronic timer DA Removeable multi-setting digital astronomical timer. (Accessories not required for operation of transformer) (For 300 or 600 Models Only)	Standard
			C- Smudge-free clear powder-coat B - Black Z - Architectural Bronze DZ - Dark Bronze W - White GT - Granite
			Premium
			BR - Architectural Brick LZ - Light Bronze SB - Special Bronze GG - Glossy Gray R - Rust HG - Hunter Green WB - Weathered Bronze WI - Weathered Iron GM - Graphite Metallic
			Hand Finished
			G - Verde P - Pewter M - Mocha OF - Olde Finish

FEATURES:

- Stainless steel, custom-designed, weather-tight casing seals components from moisture and debris. Vista's Smudge-Free clear powder-coat ensures a like-brand-new look for years to come.
- Take-apart stainless steel hinges for easy door removal allowing greater access during installation.
- Water-resistant weather-stripping around door seal.
- Easy to read instructions mounted inside door.
- Magnetic overload circuit breakers for reliable automatic circuit protection under all conditions. A rocker switch may also be used for manual on/off switching.
- Over-sized wiring compartment makes cable installation easy.
- ½"-¾" knockouts on each side of enclosure for conduit and accessory mounting as well as a removable, swing-down enclosure bottom with Adjustable Cable Raceway Feeder and multiple ½"-¾" and 2" knockouts.
- Extra-large terminal strip for multiple low voltage cable connections.
- Separate accessory terminal strip for easy installation of optional photo-cell, motion sensor, or other external switching devices.
- 6-foot, heavy-gauge, grounded, water-resistant power cord with integrally molded plug.
- 120-volt Accessory receptacle for use with optional, removable multi-setting mechanical 24-hour timer or electronic/digital 7-day timer (with battery back-up).
- Lockable, stainless steel latch can be secured to prevent tampering.
- Discrete louvered vents in the rear and sides of the cabinet maintain a cool operating temperature.
- 120-volt terminal strip for easy hard-wiring.
- Optional photocell is available for use with timers or stand-alone.
- Electronic timer and remote photocell combination standard in RP models.
- UL Listed to U.S. and Canadian safety standards for landscape lighting transformers (UL 1838). Pool & Spa Ready - Suitable for use with Submersible Luminaires or Submersible Pumps.
- Mounting template included.
- Primary Voltage also available in 208V, 230V or 277V, 50 or 60 cycle - Special order only, consult factory.

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.