

# EasyPro™

pond products




## Black Waterfall FOAM

**No applicator gun needed!**  
**Maximum Yield**  
**Minimal Expanding**

- Fills gaps, cracks and voids
- Safe for aquatic plants and fish
- Bonds to most surfaces
- Dries in 30 minutes

**Patented  
Dispensing  
System!**

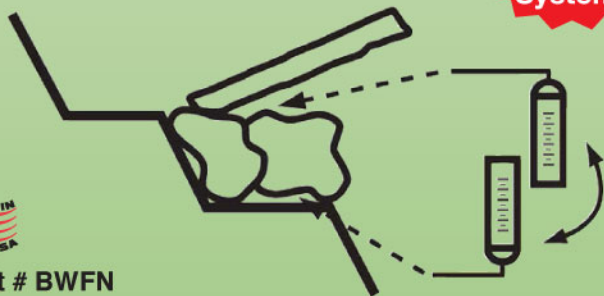

Part # BWFN  
NET WT. 20 OZ.

EASYPRO POND PRODUCTS  
www.easypropondproducts.com

**Do-It-Yourself Black Waterfall Foam** is a maximum yield/minimal expanding black foam. Maximize yield and control with the patented all directional dispensing system and the newly designed trigger with storage nub.

**DIRECTIONS: Important - read all directions and cautions before use. Always wear gloves, eye protection and work clothes. Use drop clothes. Product is flammable during dispensing.**

**Preparation:** Surfaces should be free of oil and dirt to promote adhesion. Connect straw to adapter, then carefully screw onto patented valve. **With trigger assembly attached, SHAKE CAN WELL FOR 30 SECONDS.** Holding upright, activate trigger until foam begins to dispense. Elongated trigger enhances the control of foam dispensed. For best result, apply in temperatures between 60° - 100°F (16° - 38°C).

**Application:** Foam can be dispensed **ANY ANGLE.** For best results, apply in spaces with 40% or greater relative humidity. Fill gap no more than 1/3 full, allowing room for expansion. Foam will continue to dispense for a few seconds after releasing the trigger - keep the straw moving to reduce the possibility of overfilling. Foam is tack free in 30 minutes. Foam may be trimmed, sanded, caulked or plastered in one hour.

**Clean-up:** If wet foam contacts skin, clean immediately with acetone. **DO NOT USE WATER.** Do not attempt to remove cured foam with solvent - cured foam wears off and is not harmful to health.

**Storage:** Store can upright below 90°F. With trigger nub, can may be restarted for up to three weeks. To restart, cut end off straw (removing cured foam), shake well and apply as directed above.

**CAUTION:** Contains MDI Monomer, Polyurethane Resin and Propane/Isobutane. If burned, dried foam may release hazardous decomposition products. Keep away from heat, sparks, flames and static electricity. Turn off sources of ignition (pilot lights, etc.) work in well ventilated area. Vapors heavier than air may cause flash fire or ignite explosively. Overexposure to vapors will cause dizziness or headache - move to fresh air. Do not puncture, expose to heat, direct sunlight or store at temperatures above 120°F (49°C). Dried foam may be combustible if exposed to flame or temperatures above 240°F (116°C). Do not leave in auto. In case of eye contact, flush the eye with water for 15 minutes and get immediate medical attention. If ingested, call a physician. **KEEP OUT OF REACH OF CHILDREN.**



UNDERWRITERS LABORATORIES, INC.  
CLASSIFIED CAULKING AND SEALANT

Surface Burning Characteristics  
Applied To Inorganic Reinforced Cement Board\*  
Flame Spread 10 Smoke Developed 15

\*Test as applied in two 3/4 diameter beads 8" on center covering 8.3% of the exposed test sample area.

