

# AQUALINE™

## SERIES PERMEABLE PAVER

LOW-MAINTENANCE, VERSATILE PATTERN RANGE ALLOWS FOR FLEXIBLE DESIGN OPTIONS, MAKING AN EXCELLENT CHOICE FOR VEHICULAR USE








**BELGARD**  
PAVES THE WAY™




COMMERCIAL

# AQUALINE™ SERIES PERMEABLE PAVER

| PAVER THICKNESS                                  | APPLICATIONS  |   |   |   | MECHANICAL INSTALL  | SPACER BAR WIDTH | % SURFACE OPENING | CHAMFER WIDTH |      |
|--|---|---|---|---|---|------------------|-------------------|---------------|------|
|  |  |  |  |  |  |                  |                   |               |      |
| Ashlar 3-Piece<br>(4½" x 4½", 4½" x 9", 9" x 9") | 80 mm   | ✓   | ✓   |   |   | ✓                | 10 mm             | 12%           | 3 mm |
| 4½" x 9"   | 80 mm   | ✓   | ✓   | ✓   | ✓   | ✓                | 10 mm             | 10%           | 3 mm |
| 9" L-Shape                                       | 80 mm   | ✓   | ✓   | ✓   | ✓   | ✓                | 10 mm             | 10%           | 3 mm |
| 3" x 12"   | 80 mm   | ✓   | ✓   |   |   |                  | 10 mm             | 14%           | 3 mm |
| 6" x 6"  | 80 mm   | ✓   | ✓   | ✓   |   |                  | 10 mm             | 11%           | 3 mm |
| 6" x 12"   | 80 mm   | ✓   | ✓   |   |   |                  | 10 mm             | 9%            | 3 mm |
| 6" x 12"   | 101.6 mm  | ✓   | ✓   | ✓   | ✓   | ✓                | 10 mm             | 9%            | 3 mm |
| 12" x 12"  | 80 mm   | ✓   | ✓   |   |   |                  | 10 mm             | 6%            | 3 mm |
| 12" L-Shape                                      | 80 mm   | ✓   | ✓   |   |   | ✓                | 10 mm             | 8%            | 3 mm |


## SAMPLE AQUALINE PATTERNS

NOTE: Patterns recommended for **VEHICULAR USE** are highlighted in **orange**. More patterns are available at [BelgardCommercial.com](http://BelgardCommercial.com)

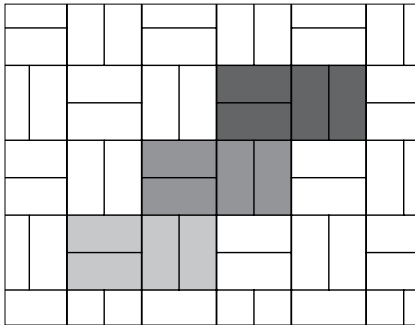


**BASKET WEAVE**

4.5 x 9 or 6 x 12

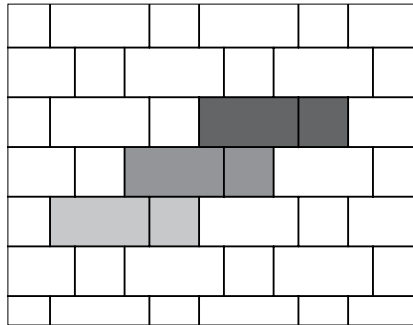


**COURSED RUNNING BOND**

2-6 x 12 (66%), 2-6 x 6 (34%)

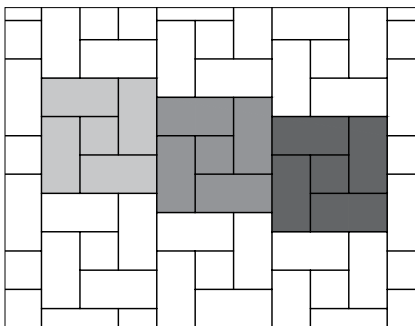

**SPANISH BOND**

1-6 x 6 (11%), 4-6 x 12 (89%)

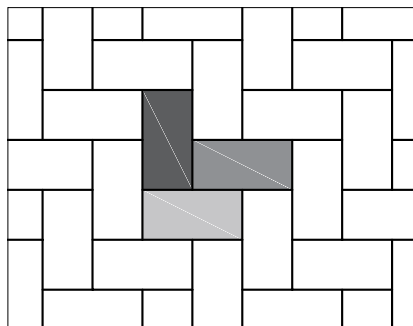

**HERRINGBONE**

4.5 x 9 or 6 x 12

Check with your local Belgard Representative for product availability and color options.

## FEATURES & BENEFITS

- Belgard's Aqualine permeable pavement systems can eliminate stormwater runoff and improve water quality
- Interlocking spacer bars for increased structural performance
- Smooth surface texture with a micro-chamfer to minimize vibration and enhance wheelchair comfort
- Can be utilized to construct an ADA-compliant pavement
- True installed dimensions for design optimization
- Optimal joint openings for infiltration and maintenance
- Meet the requirements of ASTM C936
- Surface Infiltration Rate: > 500 inches per hour (varies based on joint infill gradation)

*Belgard permeable pavers can be used for a variety of different vehicular applications. Appropriate shape and thickness is based on project-specific conditions, including type of loading, base design, and subgrade conditions. It is recommended that you consult a Belgard Representative when specifying products for vehicular applications.*