




---

PROJECT

---

CATALOG #

---

TYPE

---

NOTES

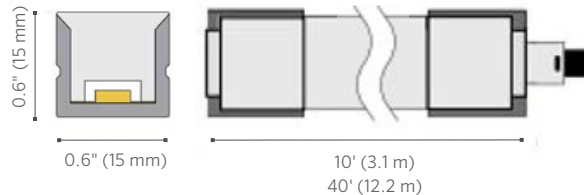
---

## SRP Strip Light STANDARD PLUS

Highly versatile white SRP Strip Lights are constructed with extruded silicone to provide superior protection against tough outdoor conditions. A full spectrum of accessories ensures easy installation in a variety of settings.

### Quick Facts

- 12 VAC input voltage
  - Handy 2" (51 mm) cut marks provide precision customization
  - 2,700K and 3,000K color temperature options
  - IP65 rating for reliable performance
- Designed for solder- and adhesive-free connections
  - Compatible with the Luxor® Low-Voltage CUBE for zoning and dimming



# SRP Strip Light SPECIFICATIONS

Output	SRP
Total Lumens†	28.7 lm/ft (94.6 lm/m)
Input Voltage	10 to 15 V
Input Power	0.6 W/ft (2.1 W/m)
VA	0.7 W/ft (2.2 W/m)
Efficacy (lm/W)	44.7
Color Rendering Index (CRI)	93
Center Beam Candlepower	408
<b>Dimming</b>	
Primary Dimming (Transformer)	Consult transformer specifications
Secondary Dimming (Fixture)	Phase-cut*
RGBW Available	No
Minimum Rated Life L90 B10 (Hrs)	50,000

\* For optimal performance, use a trailing-edge (reverse phase-cut) dimmer.

## FX Luminaire

FX Luminaire is an industry-leading manufacturer of landscape and architectural lighting products with a focus on the advancement of LED technology and digital lighting control with zoning, dimming, and color adjustment capabilities. We offer a full spectrum of specification-driven lighting fixtures that can be used to create elegant landscape lighting systems for commercial or residential applications. Our products are available exclusively via our extensive professional distributor network.

## Materials

Silicone

## Lamp

Integrated

## Wiring

20 AWG (0.8 mm); VW-1; 176°F (80°C); 300 V; 10' (3 m) length, prestripped

## Power

Input 10 to 15 VAC/VDC, 50/60 Hz. Remote transformer required (specify separately).

## Housing

Silicone

## Finish

White

## Hardware

Includes 3" (76 mm) and 6" (152 mm) jumpers, splice clamps, LED spacer, end connector, and mounting clips.

## Ambient Operating Temperature

0°F to 140°F (-18°C to 60°C)

## Weight

10' (3.1 m) = 2.3 lbs (1.04 kg)  
40' (12.2 m) = 9.0 lbs (4.08 kg)

## Control

Compatible with Luxor Controllers for zoning and dimming when used with a Luxor Low-Voltage CUBE Device.

## Sustainability

Innovation meets conservation in the design and manufacturing of our products. Where we can, we use recycled materials while maintaining superior functionality. Our LED products provide high-quality light at optimal energy efficiency, lifespan, and durability.

## Installation Requirements

Refer to the product installation guide for complete installation requirements.

## International Compliance

This product contains a light source of energy efficiency class G. Tested according to: EN 55015:2013/A1:2015 EN 61547:2009

## Warranty

5-year limited warranty

## Listings



# SRP Strip Light ORDERING INFORMATION



Fixture	Length	Color Temp
SRP	■ 10 10' (3.1 m)	■ W Warm (2,700K)
	■ 40 40' (12.2 m)	■ S Soft (3,000K)

EXAMPLE FIXTURE CONFIGURATION:


SRP-10-W



## MOUNTING OPTIONS: Specify Separately


Item	Code	
<b>HARDSCAPE MOUNT</b> 2.5" (64 mm) width x 3.0" (76 mm) depth	SRP-MNT	
<b>ALUMINUM CHANNEL MOUNT</b> 3.3' length (1.0 m) x 0.8" (20 mm) width x 0.7" (18 mm) height	SRP-CHN	

## ACCESSORIES: Specify Separately

Item	Code	
■ SPLICE CONNECTORS	SRP-CONNECT*	
■ CUTTER TOOL	SRP-CUT	

\* Includes jumper cables, closed-end connectors, and power feeds.

## LUXOR TECHNOLOGY OPTIONS: Specify Separately

Item	Code	
<b>LOW-VOLTAGE CUBE</b> Supports AC dimmable LEDs and incandescent; MAX LOAD: 60 W/5 A	LCM-LV	

# SRP Strip Light PHOTOMETRICS

## SRP Illuminance at a Distance

Feet (Meters)	Center Beam	Beam Width	
	Foot-Candles (Lux)	Vertical 115.7°	Horizontal 115.5°
3.3' (1.0 m)	2.9 fc (1.1 lx)	10.5' (3.2 m)	10.5' (3.2 m)
6.7' (2.0 m)	0.7 fc (0.3 lx)	21.3' (6.5 m)	21.2' (6.5 m)
10.0' (3.1 m)	0.3 fc (0.1 lx)	31.8' (9.7 m)	31.7' (9.7 m)
13.3' (4.1 m)	0.2 fc (0.1 lx)	42.3' (12.9 m)	42.2' (12.9 m)
16.7' (5.1 m)	0.1 fc (0 lx)	53.1' (16.2 m)	52.9' (16.1 m)
20.0' (6.1 m)	0.1 fc (0 lx)	63.6' (19.4 m)	63.4' (19.3 m)

© 2021 Hunter Industries™. Hunter, FX Luminaire, all related logos, and all other trademarks are property of Hunter Industries, registered in the U.S. and other countries.