


# QUICK COUPLERS

Size: ¾", 1"  
Pressure Rating: 150 PSI

## FEATURES

- 100% interchangeable with major brands\*
- Red brass and stainless steel construction
- Heavy-duty thermoplastic locking and non-locking covers
- Optional winged stabilization and ACME key connection
- Stainless steel lug on 1" and 1¼" keys
- Spring-loaded covers with stainless steel springs for positive closing and protection of valve's sealing components
- Warranty period: 5 years

\* See compatibility chart on page 165

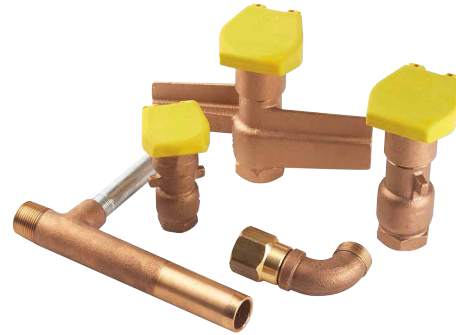

Quick Couplers



### Reclaimed Water Option

All locking models have an optional purple cover for sites using reclaimed water.

### HQ PRESSURE LOSS IN PSI

Flow (GPM)	HQ-3	HQ-33	HQ-44	HQ-5
5	0.8	1.0		
10	1.8	2.0		
15	4.1	4.3	2.2	
20	7.2	7.6	4.4	1.0
30			11.5	3.0
40				6.3
50				9.2
60				13.0
70				19.8

### QUICK COUPLER, KEY, AND HOSE SWIVEL CHARTS

Model	Inlet Threads	Slots	Body	Color*	Locking	Key	Swivels
HQ-3RC	¾"	2	1 - Piece	Yellow	No	HK-33	HS-0
HQ-33DRC	¾"	2	2 - Piece	Yellow	No	HK-33	HS-0
HQ-33DLRC	¾"	2	2 - Piece	Yellow	Yes	HK-33	HS-0
HQ-44RC	1" NPT	1	2 - Piece	Yellow	No	HK-44	HS-1 or HS-2
HQ-44LRC	1" NPT	1	2 - Piece	Yellow	Yes	HK-44	HS-1 or HS-2
HQ-44RC-AW	1" NPT	ACME	2 - Piece Wing**	Yellow	No	HK-44A	HS-1 or HS-2
HQ-44LRC-AW	1" NPT	ACME	2 - Piece Wing**	Yellow	Yes	HK-44A	HS-1 or HS-2
HQ-5RC	1" NPT	1	1 - Piece	Yellow	No	HK-55	HS-1 or HS-2
HQ-5LRC	1" NPT	1	1 - Piece	Yellow	Yes	HK-55	HS-1 or HS-2

#### Notes:

\* All locking cover models are available with purple covers for reclaimed water applications.

\*\* Anti-rotation stabilization wings.