

Quick Coupling Valves

Quick Coupler Solutions for Every Application

An early pioneer in the manufacture of quick coupling valves, Buckner today continues to provide the most complete options to meet current landscape needs.

- **Industry's Widest Range of Quick Coupler Solutions**


Offering a full line of quick coupling valves for both potable and recycled water applications

- **Durable Design**

Manufactured with top-quality red brass and EPDM rubber components to ensure maximum longevity and performance

- **Water District Compliant**

Non-potable quick couplers meet all requirements of updated water district standards and current recycled water best practices

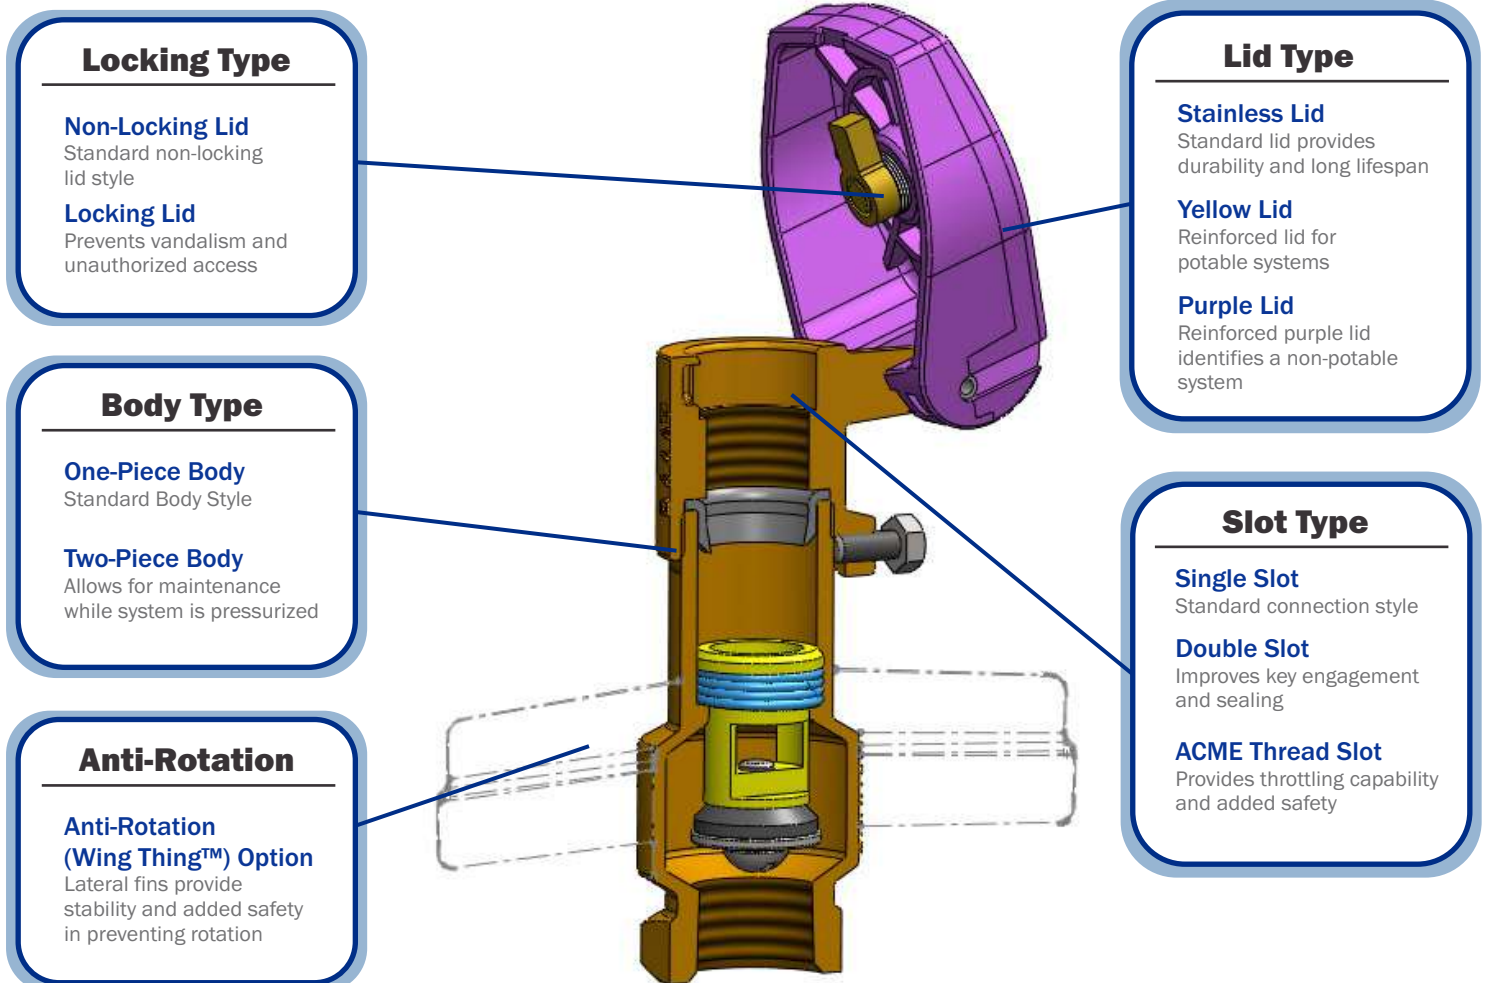

Quick Couplers for Potable Water

QCV Series

Standard Single-Slot Model



Size	Models	Keys	Hose Swivel
3/4"	QCV075	QB33K07	HS075
	QCV075R		
	QCV075RL		
1"	QCV100	QB44K10	HS100 / HS101
	QCV100R		
	QCV100RL		
1-1/2"	QCV151	QC151	HS151
	QCV151R		
	QCV151RL		

R=Yellow Lid L=Locking Lid

- ✓ 1-Piece Body, Single Slot
- ✓ Locking Lid Option Available

QB Series

Double-Slot Model for Frequent Water Access



Size	Models	Keys	Hose Swivel
3/4"	QB3RC07	QB33K07	HS075
	QB3LRC07		
1"	QB5RC10	QB55K10	HS100 / HS101
	QB5LRC10		
	QB5SL10		
	QB5RCAR10		
	QB5LRCAR10		
1-1/2"	QB7RC15	QB7DK15	HS151
	QB7SL15		
	QB7LRC15		

R=Yellow Lid L=Locking Lid AR=Anti-Rotation

- ✓ 1-Piece Body, Double Slot
- ✓ Locking Lid Option Available
- ✓ Anti-Rotation Option Available

QB Series

Premium Model for Performance & Serviceability



Size	Models	Keys	Hose Swivel
3/4"	QB33RC07	QB33K07	HS075
	QB33LRC07		
1"	QB44RC10	QB44K10	HS100 / HS101
	QB44LRC10		
	QB44RCAR10		
	QB44LRCAR10		

R=Yellow Lid L=Locking Lid AR=Anti-Rotation

- ✓ 2-Piece Body
- ✓ Locking Lid Option Available
- ✓ Anti-Rotation Option Available

For additional models & options, please see www.BucknerSuperior.com

Quick Couplers for Non-Potable Water



- ✓ ACME Key
- ✓ 150+ PSI Rated
- ✓ Locking Purple Lid
- ✓ English/Spanish "Do Not Drink" Stamp

Conforms to the Most Stringent Water District Best Practices & Labeling Requirements

(*See Below)

QB44NPAT10

The Industry Standard for Recycled Water Sites



Size	Models	Keys	Hose Swivel
1"	QB44NPAT10	QB44KAT10	HS100 / HS101



ACME Key


- ✓ 2-Piece Body
- ✓ Locking Purple Lid
- ✓ ACME Thread

QB44NPATAR10

The Industry Standard Quick Coupler w/ Anti-Rotation



Size	Models	Keys	Hose Swivel
1"	QB44NPATAR10	QB44KAT10	HS100 / HS101



ACME Key

- ✓ 2-Piece Body
- ✓ Locking Purple Lid
- ✓ ACME Thread
- ✓ Adds Anti-Rotation Wings

*RECYCLED WATER SPECIFICATION BEST PRACTICES

Quick Coupling Valves used in recycled water systems shall conform to the following:

- 1) A type approved for recycled water use with a normal working pressure of 150 psi
- 2) Recycled water quick coupler must be different from potable water quick coupler valves
- 3) In order to prevent unauthorized use, the valve shall be operated only with a special coupler key with an ACME thread for opening and closing the valve
- 4) The cover shall be permanently attached to the quick coupling valves. It shall be purple rubber or vinyl
- 5) Locking covers are required

*Recycled Water User Manual, Los Angeles County Recycled Water Advisory Committee