

MAX TRENCH SHOVELS

STRENGTH & DURABILITY



CORONA® offers industry correct, color-coded trenchers for digging new trenches & cleaning them out.

- Finish your job faster with heavy-duty 12-gauge tempered steel blades that outperform some lower gauge blades
- Quickly find the right-sized tool for the job with industry-standard head sizes and colors
- Work more efficiently with dual handle angles optimized for digging or clean-out. Choose from 35° and 28°
- Limited Lifetime Warranty

Sole Saver Step
REDUCES BOOT WEAR
WITH ROUNDED CORNERS




Curved General Purpose Trencher



General Purpose Trencher

Ideal Application: Digging & Cleaning
35 Degree Design Engineered For
Efficient Removal Loose Soil & Debris

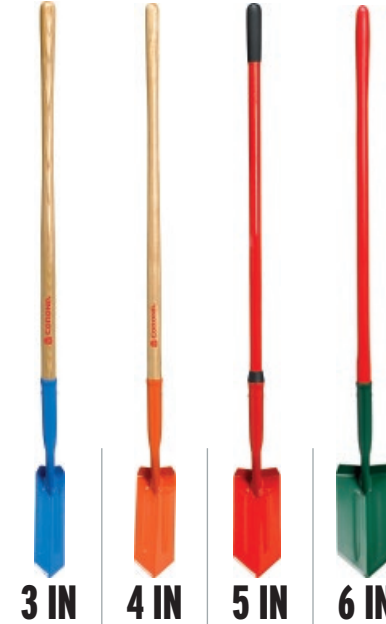

Digging Trencher

Ideal Application: Efficient Digging
28 Degree Design Engineered To
Penetrate & Loosen Compacted Soil



HEAD & BLADE	Curved General Purpose Trencher		General Purpose Trencher				Digging Trencher			
	4 IN	5 IN	3 IN	4 IN	5 IN	6 IN	3 IN	4 IN	5 IN	6 IN
HEAVY-DUTY 14 GAUGE	●	●								
HEAVY-DUTY 12 GAUGE			●	●	●	●	●	●	●	●
BEVELED V-SHAPED BLADE			●	●	●	●	●	●	●	●
Slightly Cupped Blade with Round, Tapered Nose										
HANDLE										
48 In Ash Wood			SS 64103	SS 64104	SS 64105	SS 64106	SS 64303	SS 64304	SS 64305	SS 64306
48 In Solid-core Fiberglass			SS 64223	SS 64224	SS 64225		SS 64333	SS 64334	SS 64335	
48 In Fiberglass Hollow Core	SS 64714	SS 64715	SS 64123	SS 64124	SS 64125	SS 64126	SS 64323	SS 64324	SS 64325	SS 64326

35 degree is our most popular blade type; its sharper angle makes it easier to pick up loose soil and debris. Ash replacement handles are available.

STEEL THICKNESS: The LARGER the gauge number, the THINNER and lighter the blade.



0.11" 7/64"



0.08" 5/64"



0.07" 9/128"



0.06" 1/16"

WARNING: This product can expose you to chemicals including phthalates (BBP, DBP, DEHP, DIDP, DINP and DNHP) and lead which are known to the State of California to cause cancer, birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov