



Shrubbler® 360° & 180° Adjustable Flow



The original patented Shrubbler® with flow adjustment. Flow and coverage can be altered by rotating the click indexed cap.

Features

- Finger-tip click indexed flow control with shut-off option.
- Spike models anchor Shrubbler® at the plant.
- In-Line Spike and Spike model suits 0.16" ID micro tube.
- Barb model for direct attachment to feeder and supply tubes.
- Threaded model for installation into Asta® Stakes, Asta® Stake Adapter, Micro Stake Assembly and Rigid Risers.
- 1/2" Threaded model for riser pipe installations.

Applications

Pots, tubs, landscaped gardens and nurseries. Ideal for hanging baskets. In-Line Spike model suitable for planter boxes.


DRIPPERS

ADJUSTABLE


Performance Chart - fully open (approx. 22 clicks)

Pattern		360° ✳	180° ✚
Pressure (psi)	Flow (gph)	Diameter (ft)	Radius (ft)
15	8.7	1.2	1.2
20	10.3	1.9	1.5
30	13.0	3.0	2.0


Flow Rate 360° & 180°

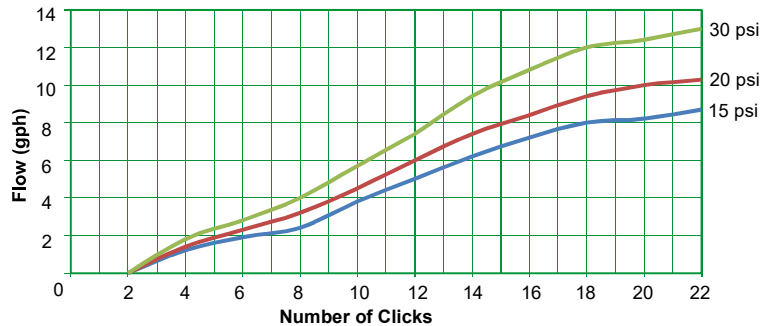

Diameter of Throw 360°

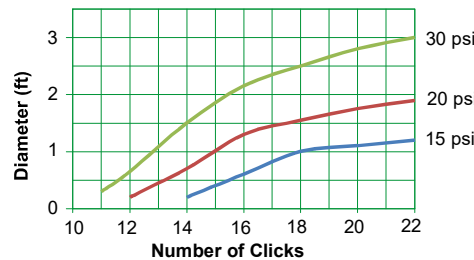

Radius of Throw 180°

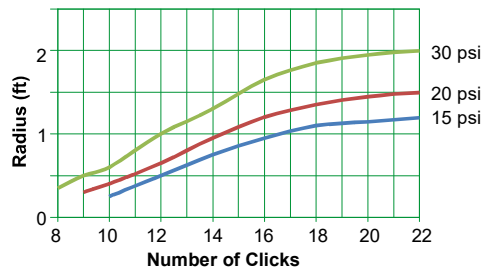

Ordering Information - Shrubbler® 360°

Base Type	Part Number	Pack Quantity	Packs Per Carton	Carton (lbs)
Barb 0.16"	31445	100	50	20.6
Thread 10-32 UNF	31415	100	50	24.6
Thread 1/2" FNPT	31425	25	50	13.8
Spike	31495	25	40	14.4
In-Line Spike	30995	25	40	14.3

Ordering Information - Shrubbler® 180°

Base Type	Part Number	Pack Quantity	Packs Per Carton	Carton (lbs)
Barb 0.16"	31245	100	50	20.6
Thread 10-32 UNF	31215	100	50	24.6
Thread 1/2" FNPT	31225	25	50	13.8
Spike	31295	25	40	14.4

* For product specifications refer to Mini Bubbler (Page 3)

Antelco irrigation equipment USA catalog 2019 www.antelco.com



Shrubbler® Barb 0.16"

Shrubbler® Spike 0.16" with Adapter

Shrubbler® Thread 10-32 UNF



Shrubbler® Thread 1/2"

Shrubbler® In-Line Spike 0.16"