



BASALITE[®]
Interlocking Paving Stones

SAN FRANCISCO COBBLESTONE








SAN FRANCISCO COBBLESTONE

Interlocking Paving Stones


For your hardscape designs that require more formal styling, these pavers offer the traditional look and feel of centuries-old cobbled block. In Renaissance colors, the collection will also provide you with the opportunity to design complementary walls and stairways to complete your personal statement.

Above: San Francisco Cobblestone in Positano
Cover: San Francisco Cobblestone in Custom Color


SPECIFICATIONS




PATTERNS




Interlace
70% rectangle and
30% square.




Random One
40% mega, 20% rectangle
and 40% square.




Random Cobble
60% Mega, 30% rectangle
and 10% square.




Herringbone
100% rectangle.



Herringbone
100% rectangle.



Rectangle Running Bond
100% rectangle.



Square Running Bond
100% square.

TYPICAL PAVER INSTALLATION*

1. Excavate unsuitable, unstable or unconsolidated subgrade material and compact the area which has been cleared. Backfill and level with dense graded aggregate suitable for base material (typically 3" - 6" for pedestrian/light vehicular traffic and 8" - 10" for driveway applications), or as otherwise directed by site engineer/architect/landscape architect.


2. Install edge restraint using concrete curb, concrete toe or edging.

3. Place bedding course of sharp normal weight screening or concrete sand to a uniform depth of approximately 1" leveled to grade.

4. Install Basalite Pavers hand tight with joints approximately 1/8". Where required, cut stones with an approved cutter to fit accurately.

5. Tamp pavers with mechanical vibrator, uniformly level true to grade and free of movement.

6. Fill voids in joints by sweeping, dry, fine, sharp sand over pavers.

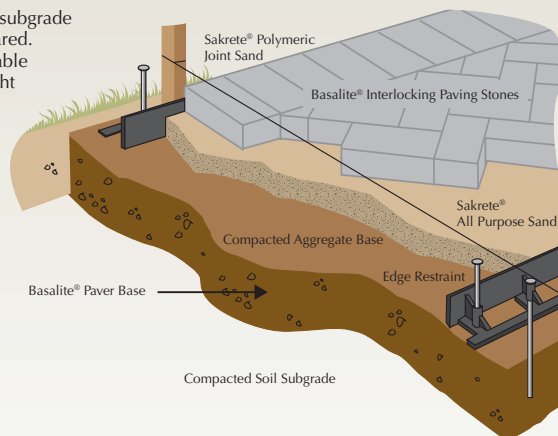

*The installation instructions and illustrations shown are a basic overview of paver installation methods. Because of the variety of applications, please refer to the Basalite® installation guide, or visit us online at basalite.com.

COLORS



Positano



Venice



Sienna



Milan



Naples



Mendocino

NOTE: Printed colors shown in this brochure may vary from actual product colors. We recommend selecting colors from actual product samples. Custom colors are available by special order - please contact your local dealer.

Visit Us Online

For more information about Basalite paving stones, retaining walls, accessories, patterns or installation instructions, visit us online at basalite.com.

Offered by:



605 Industrial Way
Dixon, CA 95620
800-776-6690

11888 West Linne Road
Tracy, CA 95376
800-776-6690

1201 Golden State Blvd
Selma, CA 93662
559-896-0753

ALBERTA • BRITISH COLUMBIA • CALIFORNIA • COLORADO • IDAHO • NEVADA • OREGON • WASHINGTON

www.basalite.com



©2015 Basalite® Concrete Products, LLC. All trademarks ® are registered trademarks.
The U.S. Green Building Council Member logo is a trademark owned by the U.S. Green Building Council and is used by permission.