

## PS LED Down Light DESIGNER PREMIUM




---

PROJECT

---

CATALOG #

---

TYPE

---


NOTES

---

The PS truly represents the next generation of fixed-mount LED down lights. It is meant for top-mounting, and is available with an optional copper cover. It is available with 3, 6 or 9LED boards and comes in all of our metal and powder coat finishes. The PS also includes a free mounting bracket that allows for tool-free servicing after initial installation.

### Quick Facts

- Die-cast aluminum or brass
- Two-layer marine-grade anodization and powder coat finish
- Natural, powder coated, or antiqued brass finishes
- Cree® Integrated LEDs
- Color temperature filters
- Compatible with Luxor® technology
- Phase and PWM dimmable
- Input voltage: 10-15V

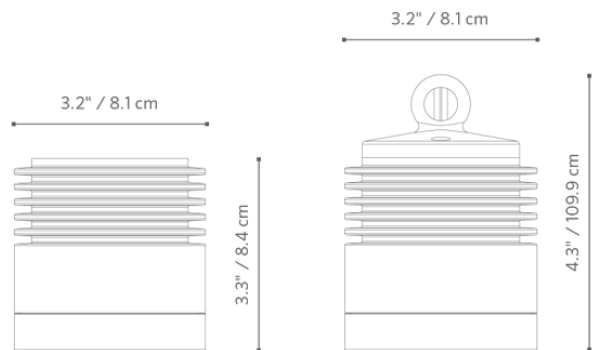

# PS LED Down Light SPECIFICATIONS

Output	3LED	3LEDT	6LED	9LED	ZDC
Total Lumens (lm)	295	157	535	796	174
Input Voltage (V)	10 to 15	10 to 15	10 to 15	10 to 15	11 to 15
Input Power (W)	4.0	4.2	7.7	11.1	9.1
VA	4.4	4.5	9.3	12.2	11.0
Efficacy (Lumens/Watt)	75	44	69	70	33
Color Rendering Index (CRI)	83	--	83	83	--
<b>Maximum Candela (cd)*</b>					
Wide Flood (60°)	335	604	610	950	198
<b>Luxor Compatibility</b>					
Default	Zoning	--	Zoning	Zoning	--
ZD Option	Zoning/Dimming	Zoning/Dimming	Zoning/Dimming	Zoning/Dimming	--
ZDC Option	--	--	--	--	Zoning/Dimming/Color
Minimum Rated Life (L70 B10)	72,000 Hrs	50,000 Hrs	72,000 Hrs	72,000 Hrs	50,000 Hrs

\* Information not available for Spot or Flood.

# PS LED Down Light SPECIFICATIONS

## About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

## Materials

Die-cast C360 brass housing and shroud with stainless steel set screws, mounting brackets, and fasteners.

## LED

Integrated module with Cree LEDs. Gold-plated connectors and conformal coated for maximum reliability and corrosion resistance. Proprietary on-board intelligent driver uses firmware-controlled temperature regulation, maximizing LED life. Field upgradeable and replaceable, the LEDs are rated to 50,000 hrs. Maximum drive current: 1 A.

## Optics

Polycarbonate color temperature adjustment lenses included with fixture: 2,700K (preinstalled), 3,900K (no lens), 4,500K, and 5,200K. Interchangeable optics for 10°, 20°, 30°-32°, or 55°-58° distributions ordered preassembled to fixture. Color temperature and beam angle lenses field serviceable. For additional color filters, spread lenses, hex baffles, etc., use MR-16 sized accessories (MR-16: 1.95" (50 mm) dia. x 1.1 mm thickness). Beam angle is calculated using LM-79 method for SSL luminaires.

## Finish

Options of natural brass (copper finish or antiqued finish with brushed (Antique Bronze) or tumbled (Antique Tumbled) effect. Antique finishes sealed with a clear TGIC powder coat layer.

## Hardware

Includes stainless steel mounting brackets for quick assembly. Tamper-resistant setscrew included.

## Wiring

18 AWG (1 mm); SPT-1W; 220°F (105°C); 300V; 3.6&#39; (1.1 m) length.

## Sockets

Socket contains MoistureBlock™ technology, preventing moisture from wicking up into sealed areas of the fixture.

## Power

Input 10-15 VAC/VDC 50/60 Hz. Remote transformer required (specify separately).

## Housing

Die-cast C360 brass housing with capacity for 1LED, 3LED, 6LED, 9LED, or ZDC integrated LEDs.

## Weight

2.5 lbs. (1.1 kg)

## Lens

Tempered glass lens with shock resistance and high tolerance for thermal expansion and stress.

## International Compliance

Compliant per IEC 60598-1 and IEC 60598-2-7 when used with custom installation kit ("WP-RD-PS-E-XX") accessory.

## Ambient Operating Temperature

0°F to 140°F (-18°C to 60°C)

## Installation Requirements

Designed for installation in the downward lighting direction only.















## Warranty

### Listings



# PS LED Down Light ORDERING INFORMATION

[field\_spec\_builder\_mount] [field\_spec\_builder\_mount]

Fixture Control	Power	Hanging Option	Finish
<b>PS</b> [Default] Zone with Luxor, On/Off, Phase Dimmable	<b>3 LED</b> 4.0W/4.4VA	<b>HB</b> (available in powder coat finishes only)	<b>BZ</b> Bronze Metallic 
<b>ZD</b> Zone/Dim with Luxor	<b>3 LEDT</b> Wildlife-Friendly Amber (585-595 nm)	<b>[default]</b>	<b>FB</b> Black 
<b>ZDC</b> Zone/Dim/Color with Luxor	<b>6 LED</b> 7.7W/9.3VA		<b>DG</b> Desert Granite 
	<b>9 LED</b> 11.1W/12.2VA		<b>WI</b> Weathered Iron 
	<b>[default ZDC option]</b> 9.1W/11.0VA		<b>SB</b> Sedona Brown 
			<b>FW</b> Flat White 
			<b>SV</b> Silver 
			<b>BSAB</b> Antique Bronze on Brass 
			<b>BSAT</b> Antique Tumbled on Brass 
			<b>CUAB</b> Antique Bronze on Copper 
			<b>CUAT</b> Antique Tumbled on Copper 
			<b>CU</b> Copper 
			<b>NP</b> Nickel Plate 
			<b>BS</b> Natural Brass 



EXAMPLE FIXTURE CONFIGURATION: PS-ZD-3LED-BS-AB

\*\* Available with ZD Luxor option and CU, AB, or AT finishes only

## PS 3LED - Illuminance at a Distance

Distance	Center Beam fc	Beam Width	
Feet (Meters)	Foot-Candles (Lux)	Vertical : 17.9 °	Horizontal : 18 °
2.0' (0.6 m)	244 fc (2,626 lx)	0.6' (0.2 m)	0.6' (0.2 m)
4.0' (1.2 m)	61 fc (657 lx)	1.3' (0.4 m)	1.3' (0.4 m)
6.0' (1.8 m)	27 fc (292 lx)	1.9' (0.6 m)	1.9' (0.6 m)
8.0' (2.4 m)	15 fc (164 lx)	3' (0.8 m)	3' (0.8 m)
10.0' (3.1 m)	10 fc (106 lx)	3' (0.8 m)	3' (0.8 m)

## PS 3LEDT - Illuminance at a Distance

Distance	Center Beam fc	Beam Width	
Feet (Meters)	Foot-Candles (Lux)	Vertical : 20.8 °	Horizontal : 20.8 °
2.0' (0.6 m)	151 fc (1,625 lx)	0.7' (0.2 m)	0.7' (0.2 m)
4.0' (1.2 m)	38 fc (406 lx)	1.5' (0.5 m)	1.5' (0.5 m)
6.0' (1.8 m)	17 fc (181 lx)	2' (0.6 m)	2' (0.6 m)
8.0' (2.4 m)	9 fc (101 lx)	3' (0.8 m)	3' (0.8 m)
10.0' (3.1 m)	6 fc (65 lx)	3.7' (1.1 m)	3.7' (1.1 m)

## PS 6LED - Illuminance at a Distance

Distance	Center Beam fc	Beam Width	
Feet (Meters)	Foot-Candles (Lux)	Vertical : 16.7 °	Horizontal : 17.1 °
2.0' (0.6 m)	506 fc (5,442 lx)	0.6' (0.2 m)	0.6' (0.2 m)
4.0' (1.2 m)	126 fc (1,361 lx)	1.2' (0.4 m)	1.2' (0.4 m)
6.0' (1.8 m)	56 fc (605 lx)	2' (0.6 m)	2' (0.6 m)
8.0' (2.4 m)	32 fc (340 lx)	2' (0.6 m)	2' (0.6 m)
10.0' (3.1 m)	20 fc (217 lx)	3' (0.8 m)	3' (0.8 m)

## PS 9LED - Illuminance at a Distance



Distance	Center Beam fc	Beam Width	
Feet (Meters)	Foot-Candles (Lux)	Vertical : 16.6 °	Horizontal : 16.1 °
2.0' (0.6 m)	569 fc (6,125 lx)	0.6' (0.2 m)	0.6' (0.2 m)
4.0' (1.2 m)	142 fc (1,532 lx)	1.2' (0.4 m)	1.1' (0.3 m)
6.0' (1.8 m)	63 fc (680 lx)	2' (0.6 m)	2' (0.6 m)
8.0' (2.4 m)	36 fc (383 lx)	2' (0.6 m)	2' (0.6 m)
10.0' (3.1 m)	23 fc (245 lx)	3' (0.8 m)	3' (0.8 m)



## PS ZDC - Illuminance at a Distance

Distance	Center Beam fc	Beam Width
Feet (Meters)	Foot-Candles (Lux)	Vertical : 49.5 °
2.0' (0.6 m)	50 fc (533 lx)	2' (0.6 m)
4.0' (1.2 m)	12 fc (134 lx)	3' (0.8 m)
6.0' (1.8 m)	6 fc (59 lx)	6' (1.7 m)
8.0' (2.4 m)	3 fc (33 lx)	7' (2.3 m)
10.0' (3.1 m)	1.9 fc (21 lx)	9' (2.8 m)

# PS LED Down Light ORDERING INFORMATION



MOUNTING OPTIONS: Specify Separately

Mounts	Catalog No.	
Hanging Cable Lock	250021820000	
Hanging Bracket for the PS Down Light	PS-HB-XX*	

Mounts	Catalog No.	
Hanging Cable	250021830000	
Round Wall Plate for the PS Down Light	WP-RD-PS-XX*	

# PS LED Down Light ORDERING INFORMATION

POWER OPTIONS: Specify Separately

Power	Catalog No.	
Plug-In Transformer, 6 W	MT-6W	
Surge Protection Module	SURGE-MOD	
-		

Power	Catalog No.	
Step-Down Transformer, UV (120/277 V to 12 V)	ST-UV	