



LANDSCAPE WALL | LEGACY STONE® JAWS SPLIT

KEYSTONE Legacy Stone®

Perfect for DIY and contractor alike, the Legacy Stone 6-inch wall system allows for a wide range of design possibilities for any outdoor space. Crisp and distinctive, Legacy Stone's natural split utilizes Keystone's JAWS Technology® and effectively showcases the color within each unit; creating projects that leave a lasting impression.



JAWS
TECHNOLOGY®
BY KEYSTONE



Unit Specifications:

6" h x 16" w x 10³/₈" d (152mm x 406mm x 264mm)

Solid Unit: 60 lbs (27 kg)

Cored Unit: 42 lbs (19 kg)⁵/₈

Cap Specifications:

3" h x 12"/16" w x 11¹/₄" d (64mm x 305/406mm x 286mm)

37 lbs (17 kg)

Units/sq.ft.: 1.5

Caps/linear ft.: .75

FEATURES & BENEFITS

Perfect For:

- Gravity walls up to 3' (0.9m) high
- Tiered walls
- Planters
- Tree rings
- Garden borders

Installation & Versatility

- Easy to handle, the unit's interlocking rear lip design requires no special tools for installation.
- Build to fit the contours of your yard by creating straight, curved or terraced walls.

Beauty and Performance

- The beauty of quarried stone combines with earth tone color blends to enhance any landscape.
- High-strength concrete blocks create a durable project that is virtually maintenance-free.

Note: Unit color, dimensions, weight & availability varies by manufacturer.



LANDSCAPE WALL | LEGACY STONE® JAWS SPLIT

KEYSTONE
Legacy Stone®

INSTALLATION INSTRUCTIONS



1. Prepare Wall Location

At wall location, dig shallow trench for wall base (see Typical Legacy Stone Section). Place granular leveling pad material. Compact and level the base pad. Place and level the first course units. If grade changes along base of wall, create stepped leveling pad as required. Always start wall at lowest elevation, working to highest. Complete base course before proceeding with additional courses.



2. Place & Compact Backfill

Backfill first course units with clean granular fill material (i.e. crushed stone/gravel). DO NOT USE PEA GRAVEL! Compact with hand tamper or appropriate mechanical compactor. Backfill and compact behind each course before installing additional courses.



3. Install Additional Courses

Starting at straight wall area, place units centered over joint of units below to form a running bond pattern. Build through curves in similar manner.

Capping: If using a cored Legacy unit, complete your wall with the appropriate cap* unit. Use exterior grade construction adhesive on the top surface of the last course before applying cap units. Backfill and compact to finish grade.



Remove Edges

To remove outside lugs or edges of retaining lip, hold unit securely or place at angle on ground. Strike the lug firmly with a hammer. Always wear safety glasses to protect eyes from chips.



Building Curves

Curves as small as 3' (0.9m) in radius can be built with Keystone Legacy Stone. Convex & concave course bonding will adjust sideways. If stack bond occurs, remove rear interlock lip as shown or cut units accordingly to get back to running bond.

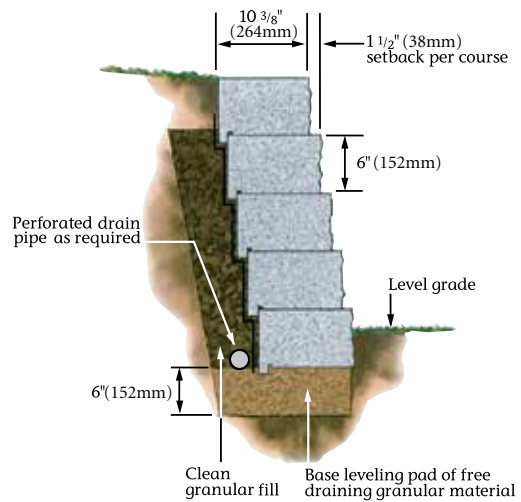

Typical Legacy Stone Section

Use clean granular backfill such as gravel or crushed stone for drainage and to prevent soil from leaching through the wall. A commercial filter fabric (stocked by most garden supply stores) may be used when existing site soils are used for backfill.

*Cap units vary by region. Contact your local Keystone representative for product availability.