



**PROFESSIONAL
OUTDOOR LIGHTING**

Type:

Model:

Project:

SPECIFICATION SHEET

MODEL ES-150 Landscape Series • Transformers

TRANSFORMER SPECIFICATIONS:

EXTERIOR CONSTRUCTION:

20-gauge polished, top-grade domestic, 304 stainless steel.

NEMA ENCLOSURE RATING: 3R

FINISH:

Polished stainless steel with Smudge-Free clear powder-coat. Also, polyester powder-coat finish available in Black, Architectural Bronze, Dark Bronze, Granite, White, Architectural Brick, Light Bronze, Special Bronze, Glossy Gray, Rust, Hunter Green, Weathered Bronze, Weathered Iron, Graphite Metallic, Verde, Pewter, Mocha and Olde Finish.

TRANSFORMER CHARACTERISTICS:

Available Power Rating: 150 Watts

Primary Voltage: 120 Volts (Also available in 208V, 230V or 277V, 50 or 60 cycle - Special order only.)

Secondary Voltage: 12 and 15 Volts

Fully grounded and isolated with encapsulated core and coil.

PRIMARY PROTECTION:

Auto thermal shut-off.

SECONDARY PROTECTION:

Resetable high performance magnetic circuit breaker.

TERMINALS:

Extra-large terminal strip for multiple low voltage cable connections.

WIRING:

6-foot, heavy-gauge, grounded, water-resistant power cord with integrally molded plug.


CERTIFICATION:

UL Listed to U.S. safety standards for landscape lighting transformers (UL 1838).

All Vista transformers are **MADE IN THE U.S.A.**



DIMENSIONS:

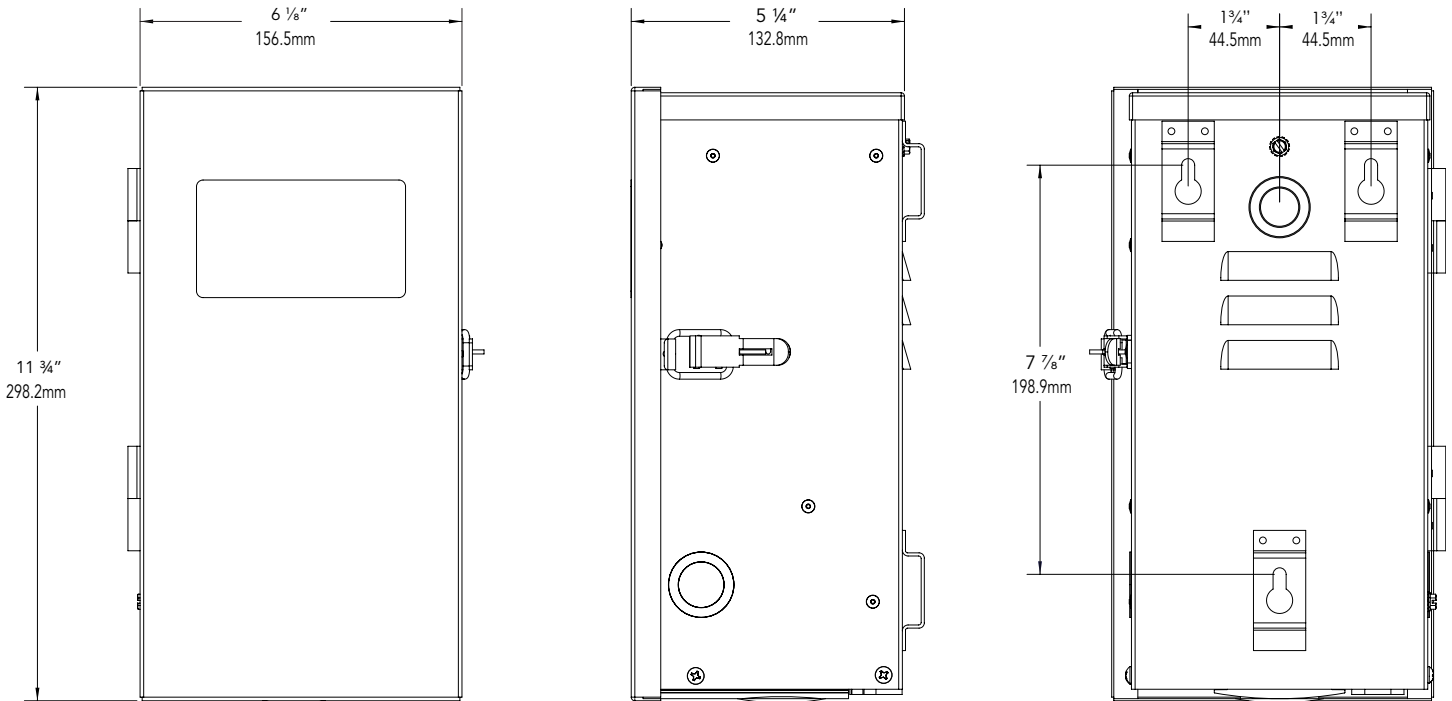

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



SPECIFICATION SHEET

MODEL ES-150 Landscape Series • Transformers

TRANSFORMER ORDERING INFORMATION

TO ORDER TRANSFORMER: Select appropriate choice from each column as in the following example.

EXAMPLE: ES-150-T-C

TRANSFORMER SERIES	TRANSFORMER MODEL	ACCESSORY OPTIONS	FINISH
ES - Energy Smart, Stainless Steel 12V Transformer	150- 150 VA	<p>T- Removable multi-setting mechanical 24-hour timer</p> <p>RP- Remote wired photocell with electronic timer</p> <p>DA- Removeable multi-setting digital astronomical timer</p> <p>(Accessories not required for operation of transformer)</p>	Standard
			<p>C- Smudge-free clear powder-coat</p> <p>B - Black</p> <p>Z - Architectural Bronze</p> <p>DZ - Dark Bronze</p> <p>W - White</p> <p>GT - Granite</p>
			Premium
			<p>BR - Architectural Brick</p> <p>LZ - Light Bronze</p> <p>SB - Special Bronze</p> <p>GG - Glossy Gray</p> <p>R - Rust</p> <p>HG - Hunter Green</p> <p>WB - Weathered Bronze</p> <p>WI - Weathered Iron</p> <p>GM - Graphite Metallic</p>
			Hand Finished
			<p>G - Verde</p> <p>P - Pewter</p> <p>M - Mocha</p> <p>OF - Olde Finish</p>

Note: When a finish is not specified, ES-150 transformers will be shipped with a clear, polyester, powder-coated finish.

FEATURES:

- Stainless steel, custom-designed, weather-tight casing seals components from moisture and debris.
- Vista's Smudge-Free clear powder-coat ensures a like-brand-new look for years to come.
- Take-apart stainless steel hinges for easy door removal allowing greater access during installation.
- Magnetic overload circuit breaker for reliable automatic circuit protection under all conditions. The circuit breaker switch may also be used for manual on/off switching of the unit.
- Over-sized wiring compartment makes cable installation easy.
- 1/2"-3/4" knockouts on each side of enclosure for conduit and accessory mounting
- Adjustable Cable Raceway Feeder easily accommodates multiple wire runs with 1/2"-3/4" conduit knockout.
- Extra-large terminal strip for multiple low voltage cable connections.
- 6-foot, heavy-gauge, grounded, water-resistant power cord with integrally molded plug.
- 120V Accessory receptacle for use with optional available timers.
- Discrete louvered vents in the rear of cabinet maintains a cool operating temperature.
- 120V terminal for easy field wiring of accessories.
- Optional photocell is available for use with timers or stand-alone.
- Mounting template included.
- Primary Voltage also available in 208V, 230V or 277V, 50 or 60 cycle - Special order only, consult factory.

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.