

## PRO-SPAN™ EXPANSION REPAIR COUPLING



RATED @200 PSI STATIC PRESSURE @ 72°F  
 MOLDED IN CHINA  
 MADE OF PVC TYPE I MATERIAL  
 GRIP-LOCK: PATENTED INTERNAL ROTATIONAL LOCK  
 OF SPIGOT TO BODY  
 EASY GRIP BODY HANDLE

ALL PARTS EXCEPT 118-30 & 118-40  
 ARE NSF/ANSI 61+372, UPC LISTED

IPS HUB X IPS SPIGOT

IPS—IRON PIPE SIZE (SAME AS SCH 40)  
 SPIGOT (SAME AS PIPE OUTSIDE DIAMETER)  
 HUB—FITS IPS PIPE

PISTON MUST BE EXTENDED 1.5" MIN.

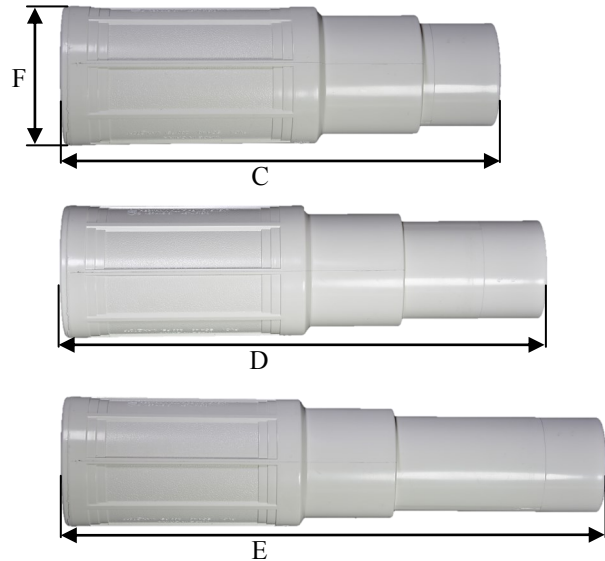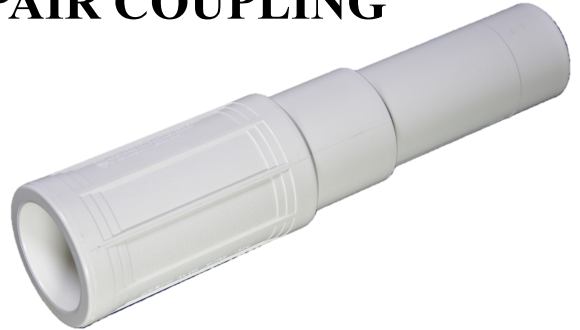

PART NUMBER	A (INCHES)	B (INCHES)	C (INCHES) (FULL COMPRESSION)	D (INCHES) (MIN. EXPANSION)	E (INCHES) (MAX EXPANSION)	F (INCHES)	WEIGHT (LBS)
118-05	0.84	0.84	5.55	6.20	7.55	1.44	0.20
118-07	1.05	1.05	5.73	6.48	7.81	1.67	0.30
118-10	1.32	1.32	6.89	7.53	9.45	2.02	0.50
118-12	1.66	1.66	7.81	8.72	10.60	2.38	0.70
118-15	1.90	1.90	9.49	10.44	12.75	2.71	1.05
118-20	2.38	2.38	9.91	10.78	13.38	3.18	1.40
118-25	2.87	2.87	13.38	14.25	18.63	3.82	2.85
118-30	3.50	3.50	15.31	16.75	20.88	4.50	4.10
118-40	4.50	4.50	16.75	18.25	22.75	5.62	6.50

