

# HC & PRO-HC

Number of Stations: **6, 12, 24, 36**  
Type: **Wi-Fi control**

## FEATURES

- Number of stations:
  - HC: 6 and 12 (24 and 36 with 12-station expansion modules)
  - Pro-HC: 6, 12, and 24 fixed stations
- Enclosure:
  - HC plastic indoor
  - Pro-HC plastic indoor and outdoor
- Wi-Fi enabled for fast and simple internet connection
- Full-color touch screen
- Full programming at the controller
- HC flow meter compatible for flow monitoring and alerts
- Built-in electrical monitoring and alerts
- Advanced sensor ports
- Hydrawise software compatible
- Warranty period: 2 years

## PRO-HC EXTRA FEATURES

- Dedicated master valve/pump start
- Large terminal strips and wiring compartment
- Built-in milliamp sensor for solenoid wire fault monitoring

## ELECTRICAL SPECIFICATIONS

- Transformer input: 120 VAC or 230 VAC (international model)
- Transformer output (24 VAC): 1 A
- Station output (24 VAC): 0.56 A
- P/MV: (24 VAC): 0.28 A
- Sensor inputs: 2

## APPROVALS

- CE, UL, cUL, C-tick, FCC



**Pro-HC (plastic indoor)**  
Height: 21 cm  
Width: 24 cm  
Depth: 8.8 cm




**Pro-HC (plastic outdoor)**  
Height: 22.8 cm  
Width: 25 cm  
Depth: 10 cm



**HC (plastic indoor)**  
Height: 15.2 cm  
Width: 17.8 cm  
Depth: 3.3 cm



**HC Flow Meter**  
\* See details on page 138

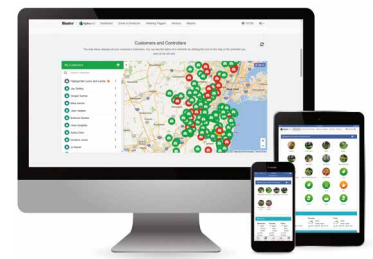

**Hydrawise™ software**  
\* See details on page 126

HYDRAWISE CONTROLLERS

### PRO-HC AND HC - SPECIFICATION BUILDER: ORDER 1 + 2 + 3 + 4

1 Models	2 Transformer	3 Indoor/Outdoor	4 Options
<b>PHC-6</b> = 6-station controller with Wi-Fi connection <b>PHC-12</b> = 12-station controller with Wi-Fi connection <b>PHC-24</b> = 24-station controller with Wi-Fi connection <b>HC-6</b> = 6-station controller with Wi-Fi connection <b>HC-12</b> = 12-station controller with Wi-Fi connection	<b>00</b> = 120 VAC <b>01</b> = 230 VAC	<b>(blank)</b> = Outdoor model <i>(internal transformer)</i>  <b>i</b> = Indoor model <i>(plug-in transformer)</i>	<b>(blank)</b> = No option <b>E</b> = 230 VAC with European connections <b>A</b> = 230 VAC with Australian connections <i>(outdoor model has internal transformer with cord)</i>

**Examples:**  
**PHC-2401-E** = 24-station 230VAC outdoor plastic controller (European Model)  
**HC-1201i-A** = 12-station 230VAC indoor plastic controller (Australian Model)